



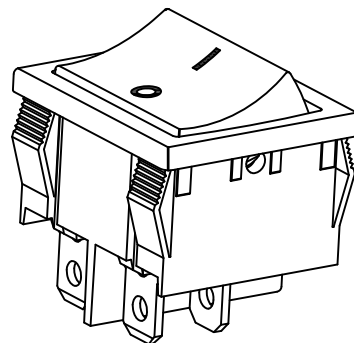

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-4

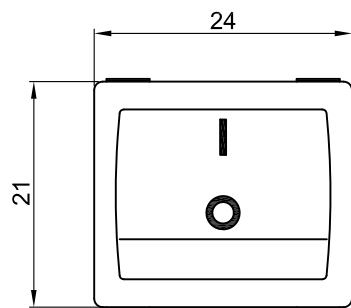

Rating: 10A 125V AC,6A 250V AC (UL CUL )US

6A 250V AC ( VDE CQC CB )




Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

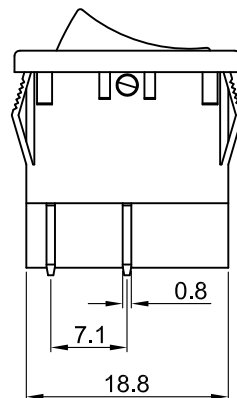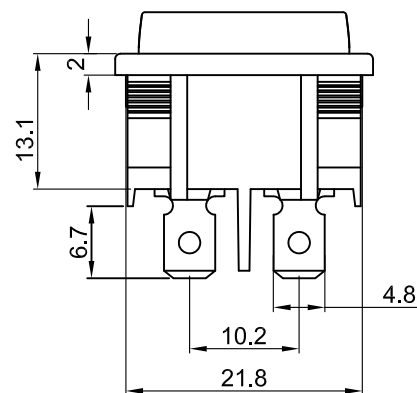

CUT-OUT


|           | X        | Y         |
|-----------|----------|-----------|
| 0.75~1.25 | 19.2-0.1 | 21.8~21.9 |
| 1.25~2.00 | 19.4-0.1 | 21.8~21.9 |
| 2.00~3.00 | 19.8-0.1 | 21.8~21.9 |

### MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



| X       | 0    | 1 | 2         | 3 | 4 | 5 | 7                   | 8             | 9      |
|---------|------|---|-----------|---|---|---|---------------------|---------------|--------|
| Marking | None |   | ON<br>OFF |   |   |   | Front/前进<br>Back/后退 | Front<br>Back | 开<br>关 |

|         |                         |         |         | 公差 TOLERANCES |    | .X± 0.3    | .XX± 0.15 | 角度 ANGLE ± 1° |            | 单位 DIMENSION UNIT mm. |                    |
|---------|-------------------------|---------|---------|---------------|----|------------|-----------|---------------|------------|-----------------------|--------------------|
|         |                         |         |         | 版本 VERSION    | A1 | 比例尺 SCALE  | NONE      | 日期 DATE       | 2020.04.15 | 品名 TITLE              | 图号 DRAWING NO      |
|         |                         |         |         | 核准            |    | 核对         | Z.H.B.    | 绘图            |            | MR-4-210-C5N-BB       | MR-4-210-C5N-BB_A1 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |    | CHECKED BY |           | DRAWN BY      |            |                       |                    |

File Code: HJ-WI-E-03A