
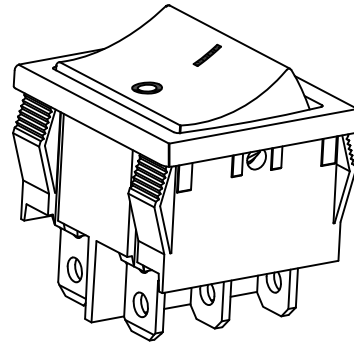


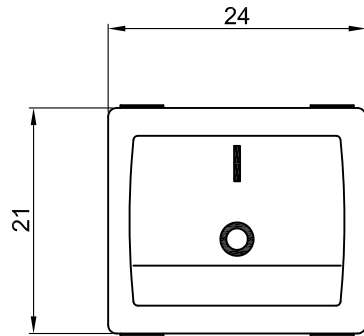

MR-4

Rating: 10A 125V AC, 6A 250V AC (UL CUL) US6A 250V AC (VDE CQC CB)  



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

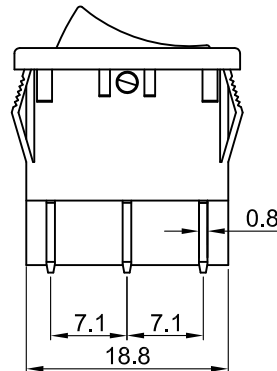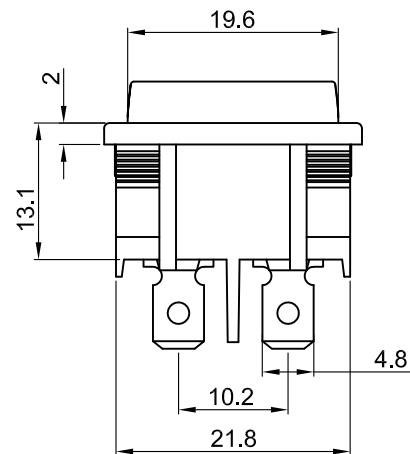

CUT-OUT




	X	Y
0.75~1.25	19.2-0.1	21.8~21.9
1.25~2.00	19.4-0.1	21.8~21.9
2.00~3.00	19.8-0.1	21.8~21.9

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



X	0	1	2	3	4	5	6	7	8	9
Marking	None	•	ON OFF	=	— O	I O	III O	Front/前进 Back/后退	Front Back	开 关

				公差 TOLERANCES	.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	品名 TITLE	图号 DRAWING NO
				核准		核对	Z.H.B.	MR-4-220-C5N-BB	MR-4-220-C5N-BB_A1
A1	重新整理后发行	2020.07.15	N/A	核 准		核 对	绘 图		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	DRAWN BY		