





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-5



Rating: 10A 125V AC, 6A 250V AC (UL CUL)_C  US



6A 250V AC (VDE CQC CB)  

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Operating Temperature: 0°C~85°C

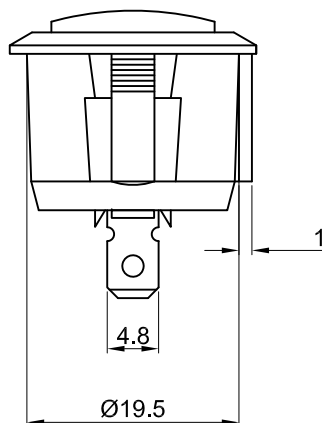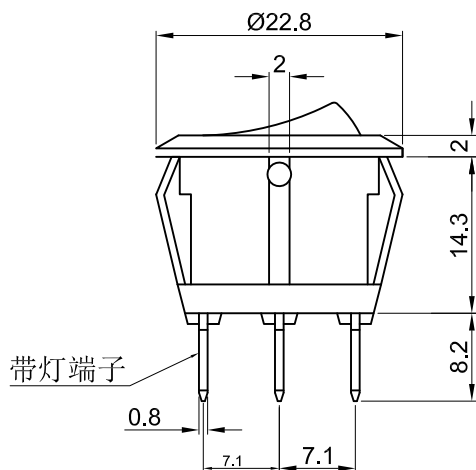

CUT-OUT

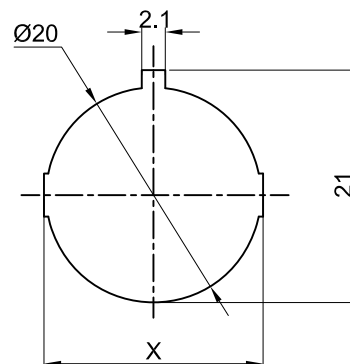

	X
0.75~1.25	20.2
1.25~2.00	20.4
2.00~3.00	20.6


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



x	0	1	2	3	4	5	6	7	11
Marking	None								

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2020.12.28	品名 TITLE	图号 DRAWING NO
				核准	王龙	核对	Z. H. B.	绘图	王立权	MR-5-110-C5L-BG	MR-5-110-C5L-BG_A0
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A