

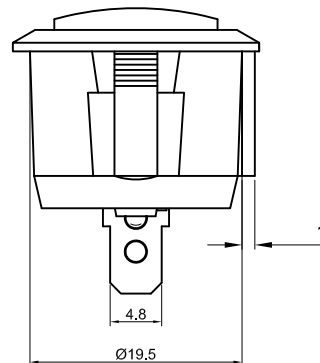
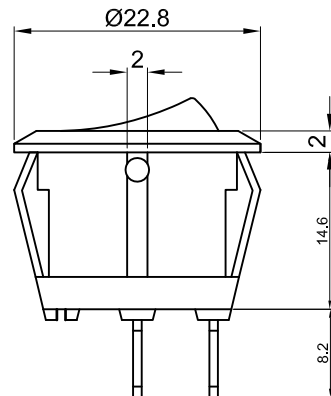




东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


MR-5



Rating: 10A 125V AC, 6A 250V AC (UL CUL)_C   
6A 250V AC (VDE CQC CB)
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C

CUT-OUT

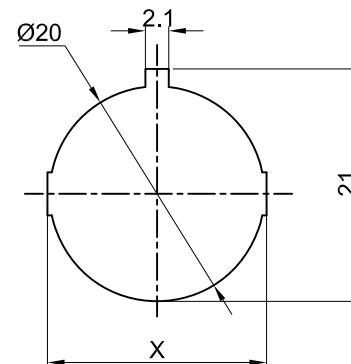


	X
0.75~1.25	20.2
1.25~2.00	20.4
2.00~3.00	20.6

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



x	0	1	2	3	4	5	7	8
Marking	None							

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2020.07.15	品名 TITLE	图号 DRAWING NO
				核准		核对	Z. H. B.	绘图	黎夏	MR-5-110-C5N-AR	MR-5-110-C5N-AR_A0
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A