

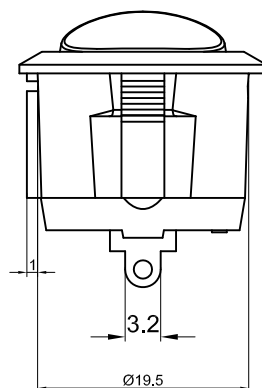
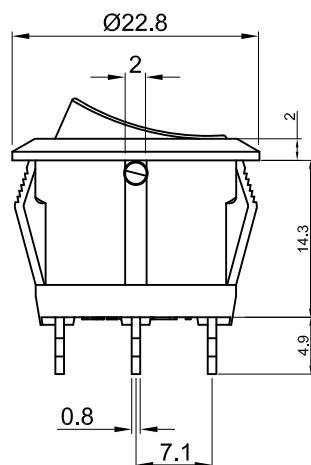




东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


MR-5



Rating: 10A 125V AC (UL CUL )  US  
6A 250V AC (UL CUL VDE CB)   
Contact Resistance: 50mΩ Max  
Insulation Resistance: DC 500V 100MΩ Min  
Dielectric Strength: AC1500V 1 minute  
Electrical life: 10,000 cycles  
Operating Temperature: 0°C ~85°C

CUT-OUT

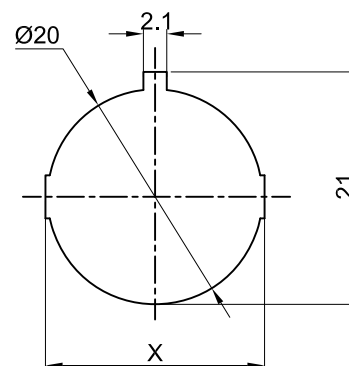

|                                                                                     |      |
|-------------------------------------------------------------------------------------|------|
|  | X    |
| 0.75~1.25                                                                           | 20.2 |
| 1.25~2.00                                                                           | 20.4 |
| 2.00~3.00                                                                           | 20.6 |


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



| x       | 0    | 1                                                                                     | 2                                                                                     | 3                                                                                     | 4                                                                                     | 5                                                                                     | 7                                                                                     | 8                                                                                     |
|---------|------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| Marking | None |  |  |  |  |  |  |  |

|         |                         |         |         |               |    |            |           |          |            |                   |       |                    |
|---------|-------------------------|---------|---------|---------------|----|------------|-----------|----------|------------|-------------------|-------|--------------------|
|         |                         |         |         | 公差 TOLERANCES |    | .X± 0.3    | .XX± 0.15 | 角度       | ± 1°       | 单位 DIMENSION UNIT |       | mm.                |
|         |                         |         |         | 版本            | A0 | 比例尺        | NONE      | 日期       | 2019.12.28 | 品名                | TITLE | 图号                 |
|         |                         |         |         | 核准            |    | 核对         | Z. H. B.  | 绘图       | 王立权        | MR-5-112-C5N-BG   |       | DRAWING NO         |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |    | CHECKED BY |           | DRAWN BY |            | MR-5-112-C5N-BG   |       | MR-5-112-C5N-BG_A0 |

File Code: HJ-WI-E-03A