

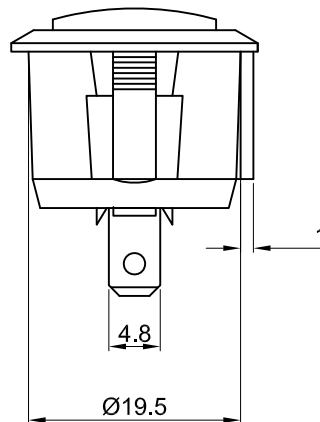
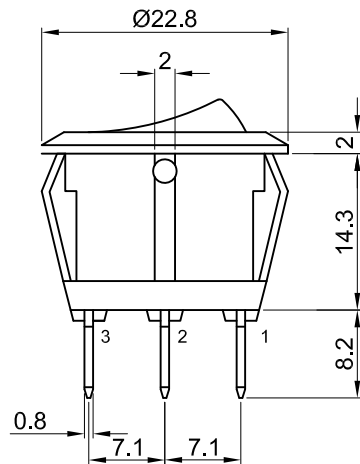


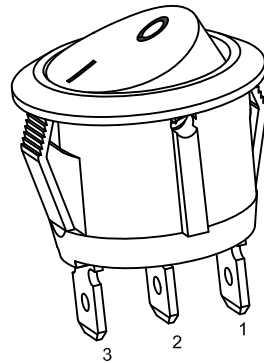

东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-5



Rating: 10A 125V AC,6A 250V AC (UL CUL )<sub>C</sub>  US  
6A 250V AC ( VDE CQC CB)    
Contact Resistance: 50mΩ Max  
Insulation Resistance: DC 500V 100MΩ Min  
Dielectric Strength: AC1500V 1 minute  
Electrical life: 10,000 cycles  
Operating Temperature: 0°C~85°C

CUT-OUT

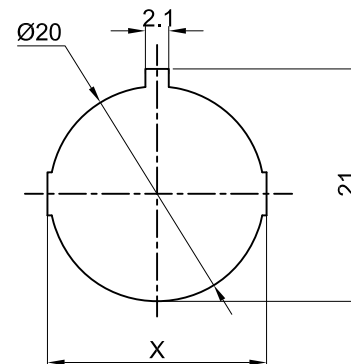


|           |      |
|-----------|------|
|           | X    |
| 0.75~1.25 | 20.2 |
| 1.25~2.00 | 20.4 |
| 2.00~3.00 | 20.6 |

## MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



- 位置按下为1#2#脚接通  
o 位置按下为2#3#脚接通

| x       | 0    | 1 | 2 | 3 | 4 | 5 | 7 | 8 |
|---------|------|---|---|---|---|---|---|---|
| Marking | None |   |   |   |   |   |   |   |

|         |                         |         |         | 公差 TOLERANCES |    | .X± 0.3    | .XX± 0.15 | 角度 ANGLE ± 1° |            | 单位 DIMENSION UNIT mm. |                    |
|---------|-------------------------|---------|---------|---------------|----|------------|-----------|---------------|------------|-----------------------|--------------------|
|         |                         |         |         | 版本 VERSION    | A1 | 比例尺 SCALE  | NONE      | 日期 DATE       | 2020.05.11 | 品名 TITLE              | 图号 DRAWING NO      |
|         |                         |         |         | 核准            |    | 核对         | Z.H.B.    | 绘图            |            | MR-5-120-C5N-BR       | MR-5-120-C5N-BR_A1 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE | ECN NO. | APPROVED BY   |    | CHECKED BY |           | DRAWN BY      |            |                       |                    |

File Code: HJ-WI-E-03A