



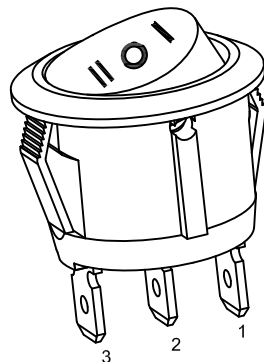

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-5



Rating: 10A 125V AC,6A 250V AC (UL CUL)_C  _{US}

6A 250V AC (VDE CQC CB)  



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

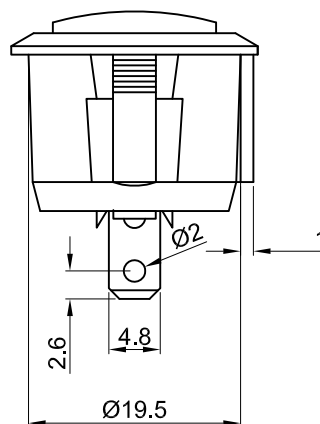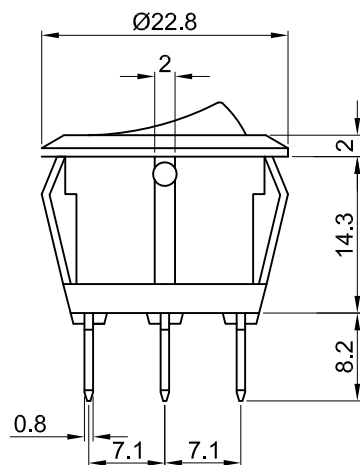

CUT-OUT

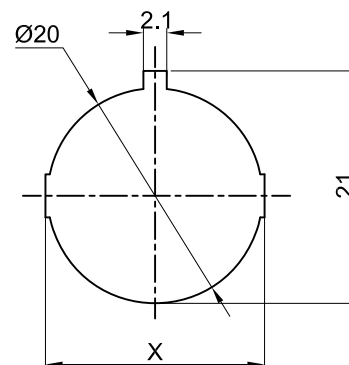


	X
0.75~1.25	20.2
1.25~2.00	20.4
2.00~3.00	20.6

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



x	0	1	2	3	4	5	6	7	8
Marking	None								

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT		mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2019.12.29	品名 TITLE		图号
				核准		核对		绘图		MR-5-138-C6N-BB		DRAWING NO
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY		MR-5-138-C6N-BB_A1		

File Code: HJ-WI-E-03A