

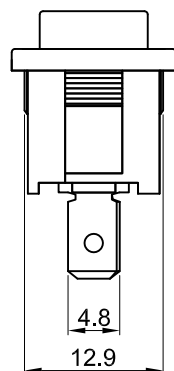
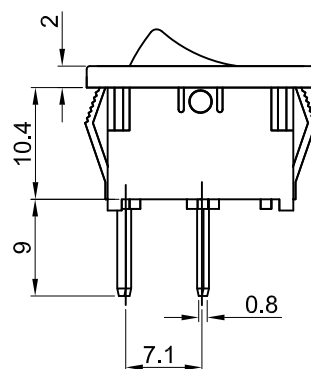




MR-1



Rating: 10A 125V AC (UL CUL) c US

6A 250V AC (CQC ENEC VDE)

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None		ON OFF				ON/开 OFF/关									开关		

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT			
.X±0.3				.XX±0.15				mm.			
版本 VERSION				比例尺 SCALE				品名 TITLE			
A1				NONE				MR-1-113-C4N-AA			
核准				核 对				图 号			
APPROVED BY				Z.H.B.				DRAWING NO			
日期 DATE				日期 DATE				MR-1-113-C4N-AA_A1			
变更说明 CHANGE DESCRIPTION				核 对				DRAWING NO			
ECN NO.				CHECKED BY				MR-1-113-C4N-AA_A1			