


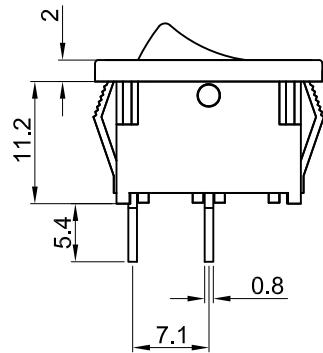




MR-1



Rating: 10A 125V AC (UL CUL) c US
6A 250V AC (CQC ENEC VDE)

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

Roto:Brass,Ni plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None		ON OFF				ON/开 OFF/关									开关		

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
				版 本	A1	比例尺	NONE	日 期	2020.07.17	品 名	图 号
			VERSION	SCALE		DATE		TITLE		DRAWING NO	
A1	重新整理后发行	2020.07.17	N/A	核 准		核 对		绘 图		MR-1-116-C2N-WWAAE	MR-1-116-C2N-WWAAE_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY			