





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 10A 125V AC (UL CUL) c US

6A 250V AC (CQC ENEC VDE)





Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C~85°C

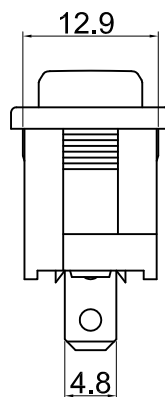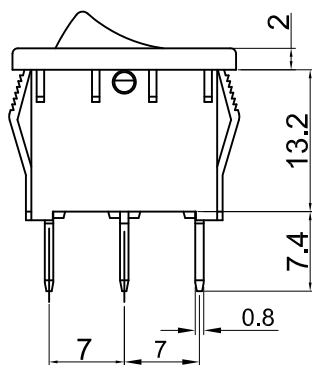

CUT-OUT



SWITCHING CIRCUIT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None		ON OFF				ON/开 OFF/关									开关		

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT			
.X± 0.3				.XX± 0.15				mm.			
版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.17	品名 TITLE	MR-1-118-C5L-BR	图号 DRAWING NO			
A1	重新整理后发行	2020.07.17	N/A	核准		核对	Z.H.B.	绘图		MR-1-118-C5L-BR-220_A1	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A