





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 10A 125V AC (UL CUL)



6A 250V AC (UL CUL VDE CB)





Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C ~85°C

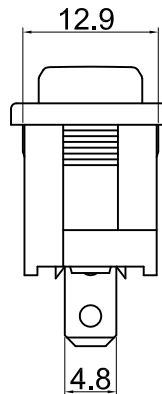

CUT-OUT



SWITCHING CIRCUIT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None	•	ON OFF	=	—	○	○	ON/开 OFF/关	※	○	☼	☼	☼	☼	☼	☼	☼	☼

				公差 TOLERANCES		.X± 0.3		.XX± 0.15		角度 ANGLE		± 1°		单位	DIMENSION UNIT		mm.	
				版 本	A1	比 例 尺	NONE	日 期	2020.07.17	MR-1-118-C5N-BB	品 名		TITLE		图 号			
				VERSION		SCALE		DATE			DRAWING NO							
A1	重新整理后发行			2020.07.17	N/A	核 准	核 对	Z.H.B.	绘 图		MR-1-118-C5N-BB	DRAWING NO						
版本 VER.	变更说明 CHANGE DESCRIPTION			日期 DATE	ECN NO.	APPROVED BY						CHECKED BY	DRAWN BY	MR-1-118-C5N-BB _A1				

File Code: HJ-WI-E-03A