







东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


MR-1




Rating: 10A 125V AC (UL CUL)  US
6A 250V AC (UL CUL VDE CB) 
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C ~85°C

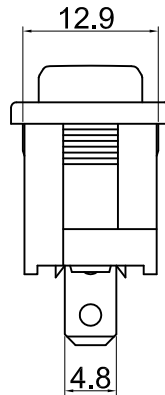

CUT-OUT



SWITCHING CIRCUIT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None		ON OFF				ON/开 OFF/关									开关		

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT			
.X± 0.3				.XX± 0.15				mm.			
版本 VERSION				比例尺 SCALE				品名 TITLE			
A1				NONE				MR-1-118-C5N-BG			
重新整理后发行				日期 DATE				图号 DRAWING NO			
2020.07.17				2020.07.17				MR-1-118-C5N-BG _A1			
N/A				核 准							
日期 DATE				核 对							
变更说明 CHANGE DESCRIPTION				Z.H.B.							
ECN NO.				绘 图							
APPROVED BY				CHECKED BY							
				DRAWN BY							

File Code: HJ-WI-E-03A