





MR-1



Rating: 10A 125V AC (UL CUL)



6A 250V AC (UL CUL VDE CB)





Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C ~85°C

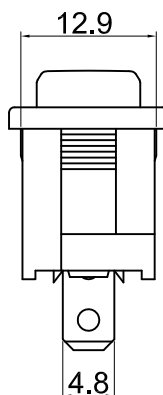

CUT-OUT



SWITCHING CIRCUIT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None	•	ON OFF	=	—	○	○	ON/开 OFF/关	※	10	☀	☀	☀	☀	☀	☀	☀	☀

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.		
				版 本	A1	比 例 尺	NONE	日 期	2020.07.17	品 名	图 号	
				VERSION		SCALE		DATE		TITLE		DRAWING NO
A1	重新整理后发行	2020.07.17	N/A	核 准		核 对		绘 图		MR-1-118-C5N-WY		MR-1-118-C5N-WY _A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Z.H.B.	DRAWN BY					