

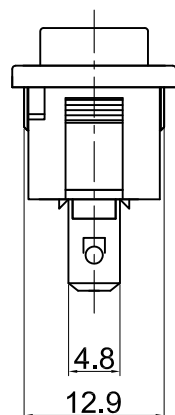





东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1




Rating: 10A 125V AC (UL CUL)  
6A 250V AC (UL CUL VDE CB) 
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C ~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
1.25~2.00	19.4 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
2.00~3.00	19.8 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	7	8	9	A	B	C	D	E	G
Marking	none	•	ON OFF	=	—	—	ON/开 OFF/关	*	/	⚡	⚡	⚡	⚡	⚡	⚡

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT			
.X± 0.3 .XX± 0.15				± 1°				mm.			
版本 VERSION				比例尺 SCALE				品名 TITLE			
A1				NONE				MR-1-119-C2N-BBAAE			
重新整理后发行				日期 DATE				图号 DRAWING NO			
2020.07.17				2020.07.17				MR-1-119-C2N-BBAAE_A1			
N/A				核准				核 对			
日期 DATE				ECN NO.				绘图			
变更说明 CHANGE DESCRIPTION				APPROVED BY				DRAWN BY			

File Code: HJ-WI-E-03A