





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 10A 125V AC (UL CUL)



6A 250V AC (UL CUL VDE CB)






Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~85°C

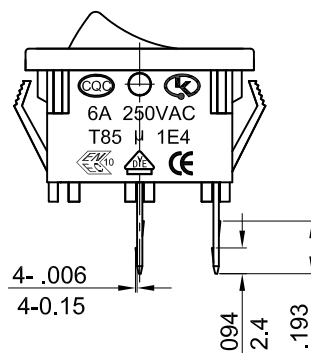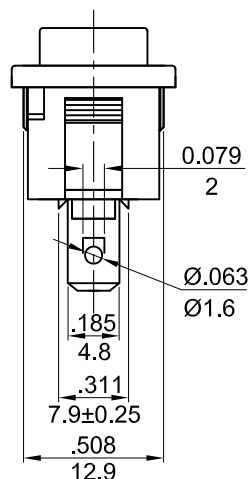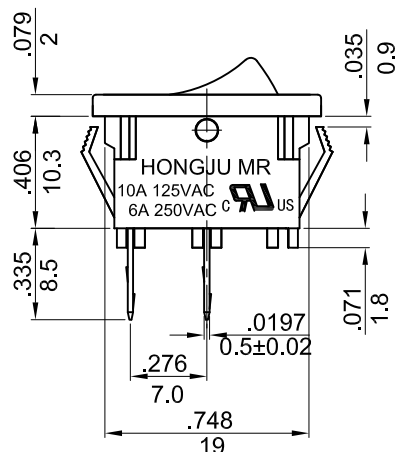


CUT-OUT



	X	Y
0.75~1.25	19.2 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
1.25~2.00	19.4 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}
2.00~3.00	19.8 ^{+0.1} _{-0.0}	12.9 ^{+0.15} _{-0.00}

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	7	8	9	A	B	C	D	E	G
Marking	none	•	ON OFF	=	—	○	ON/开 OFF/关	※	1/0	💡	⊙	⊙	⊙	并 米	⊙

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.		
				版 本	A1	比例尺	NONE	日 期	2020.07.17	品 名 TITLE	图 号	
				VERSION		SCALE		DATE				DRAWING NO
A1	重新整理后发行	2020.07.17	N/A	核 准		核 对		绘 图				MR-1-119-C2N-WWAEE
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY						

File Code: HJ-WI-E-03A