

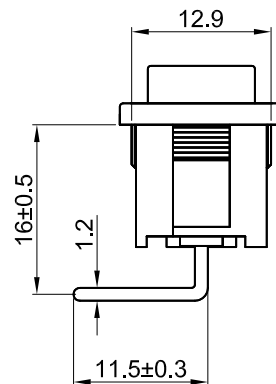
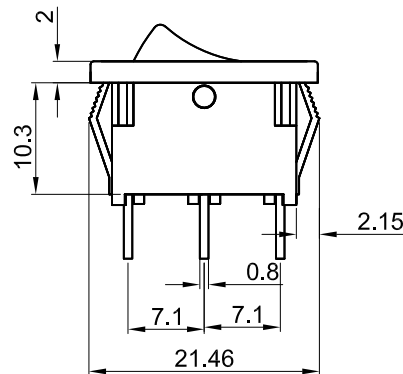




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 6A 125V AC

4.5A 250V AC

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C


CUT-OUT



CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None	•	ON OFF	≡	—	—	ON/开 OFF/关	※	—	☀	☀	☀	☀	☀	☀	☀	☀	☀

公差 TOLERANCES				.X±0.3 .XX±0.15 角度 ANGLE ±1°				单位	DIMENSION UNIT mm.	
版本	变更说明	日期	ECN NO.	核准	核对	核 对	绘 图	品 名	图 号	
VER.	CHANGE DESCRIPTION	DATE		APPROVED BY	CHECKED BY	Z.H.B.	DRAWN BY	MR-1-124-C5N-BB	DRAWING NO	
A1	重新整理后发行	2020.07.17	N/A						MR-1-124-C5N-BB_A1	

File Code: HJ-WI-E-03A