




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 10A 125V AC (UL CUL) c US
6A 250V AC (CQC ENEC VDE)



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

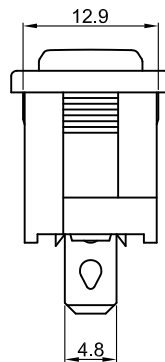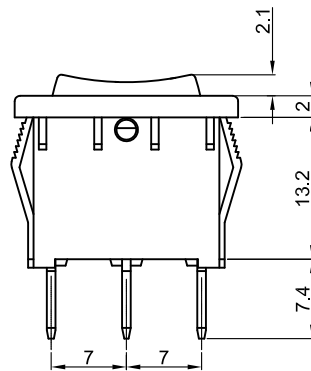


CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F	G	H	J	L
None		ON OFF					ON/开 OFF/关										开关		

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.			
				版 本	A1	比例尺	NONE	日 期	2020.07.17	品 名	TITLE	图 号		
				VERSION		SCALE		DATE					2020.07.17	DRAWING NO
A1	重新整理后发行	2020.07.17	N/A	核 准	核 对	Z.H.B.	绘 图	王立权	MR-1-168-C6N-BB				MR-1-168-C6N-BB _A1	
版本 VER.	变 更 说 明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY							

File Code: HJ-WI-E-03A