





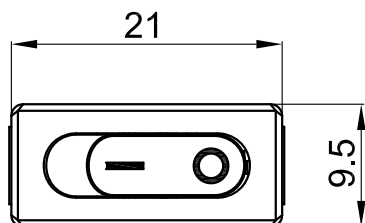


MR-2

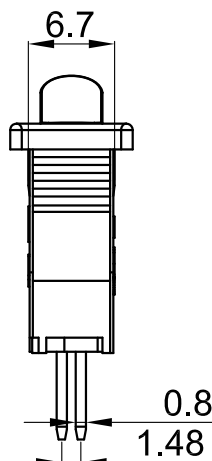


Rating: 10A 125V AC (UL CUL)  US
6A 250V AC (UL CUL VDE CB) 
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C ~85°C

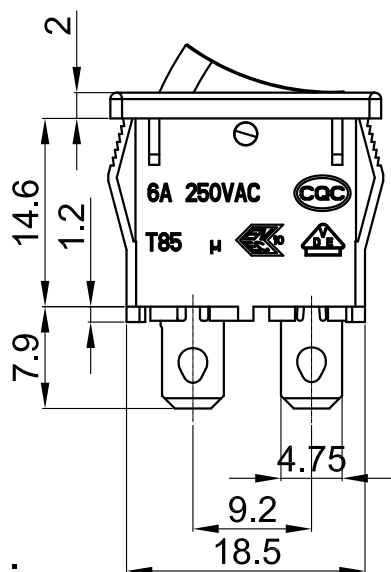


CUT-OUT



	X	Y
0.75~1.25	6.8-0.1	19.2±0.1
1.25~2.00	6.8-0.1	19.2±0.1
2.00~3.00	6.8-0.1	19.2±0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

X	0	1	5	9	A	C
Marking	None					

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE	± 1°	单位	DIMENSION UNIT		mm.
				版本	A1	比例尺	NONE	日期	2020.07.15	品名	TITLE	图号	
				核准		核对	Z.H.B.	绘图		MR2-110-C5N-BB		DRAWING NO	
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY				MR2-110-C5N-BB_A1	