





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-2

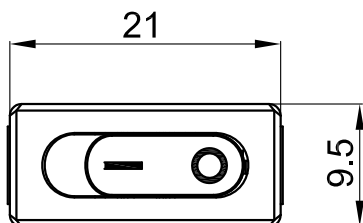

Rating: 10A 125V AC (UL CUL) US
6A 250V AC (UL CUL VDE CB)


Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C ~85°C

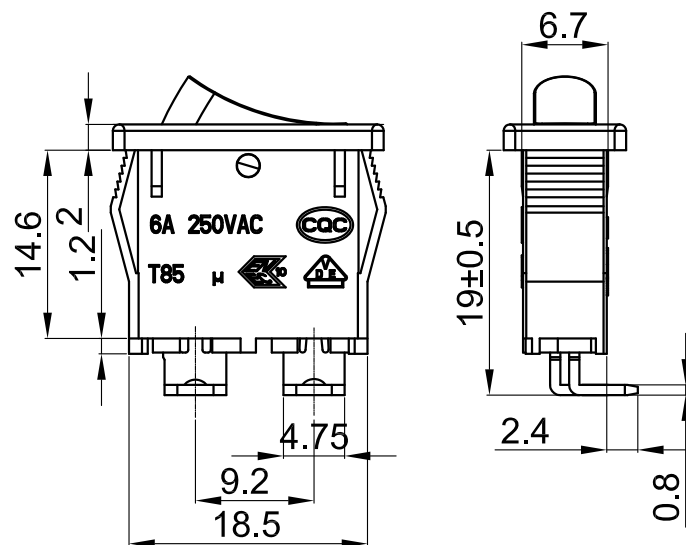

CUT-OUT



SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

X	0	1	5	9	A	C
Marking	None	•	! ○	○ !	! •	■

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.	
				版本	A1	比例尺	NONE	日期	2020.09.10	品名	TITLE	图号
				VERSION		SCALE		DATE		MR2-115-C5N-AA		DRAWING NO
A1	重新整理后发行	2020.07.15	N/A	核准		核对	Z.H.B.	绘图				MR2-115-C5N-AA_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A