

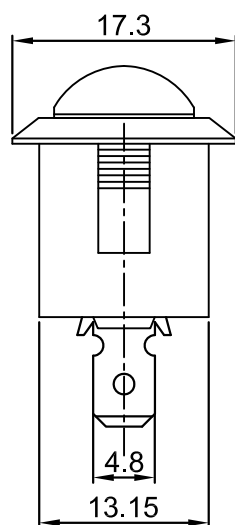
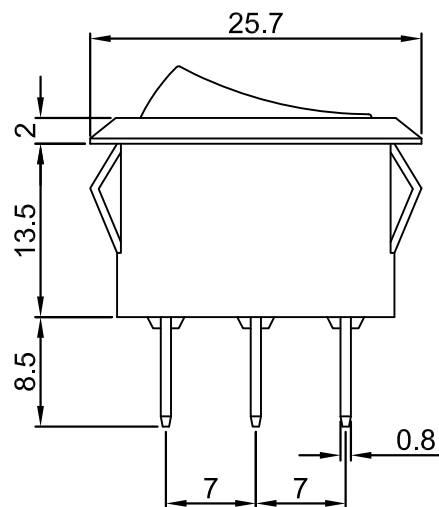




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-2A



Rating: 10A 125V AC (UL CUL)  US
6A 250V AC (UL CUL VDE CB) 

Contact Resistance: 50mΩ Max



Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature:0°C~85°C

CUT-OUT

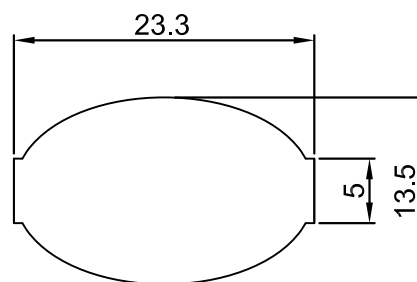

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	6	7	8	9	A	B
Marking	None											

				公差 TOLERANCES	.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	品名 TITLE	图号 DRAWING NO
				核准		核对	Z.H.B.	MR2A-110-C5L-AR	MR2A-110-C5N-AR_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	DRAWN BY		

File Code: HJ-WI-E-03A