

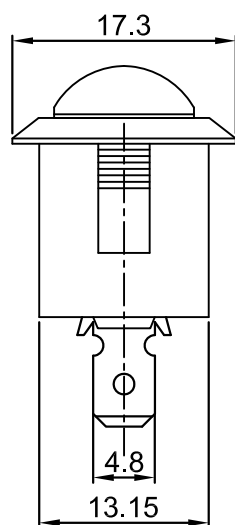
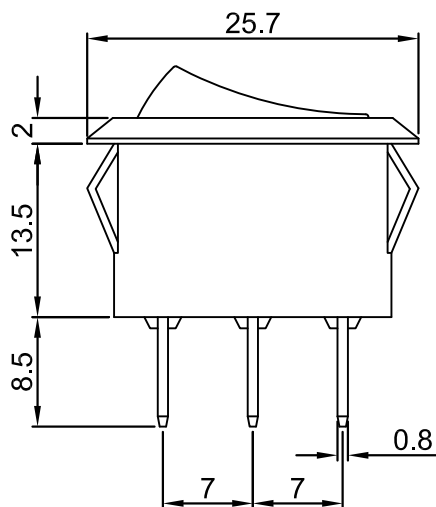




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-2A



Rating: 10A 125V AC (UL CUL)  US
6A 250V AC (UL CUL VDE CB) 

Contact Resistance: 50mΩ Max



Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

CUT-OUT

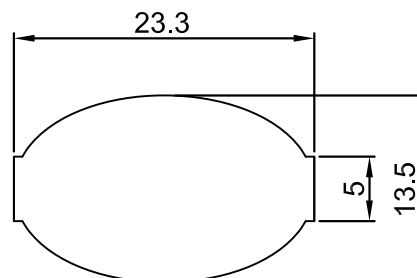

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

X	0	1	2	3	4	5	6	7	8	9	A	B
Marking	None											

公差 TOLERANCES				角度 ANGLE ± 1°				单位 DIMENSION UNIT mm.			
.X± 0.3 .XX± 0.15											
版本 VERSION				比例尺 SCALE				品名 TITLE			
A1				NONE				图号 DRAWING NO			
重新整理后发行				2019.11.18				MR2A-110-C5L-BR			
A1				核 准				MR2A-110-C5N-BR_A1			
日期 DATE				核 对							
变更说明 CHANGE DESCRIPTION				日期 DATE							
ECN NO.				APPROVED BY							
				CHECKED BY							
				Z.H.B.							
				DRAWN BY							

File Code: HJ-WI-E-03A