



东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-2A

Rating: 10A 125V AC (UL CUL)  US
6A 250V AC (UL CUL VDE CB) 



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min



Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~ 85°C

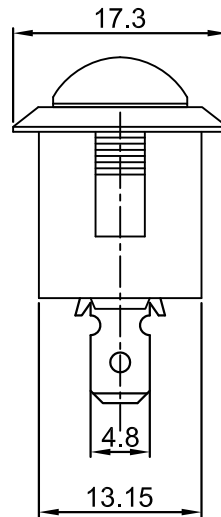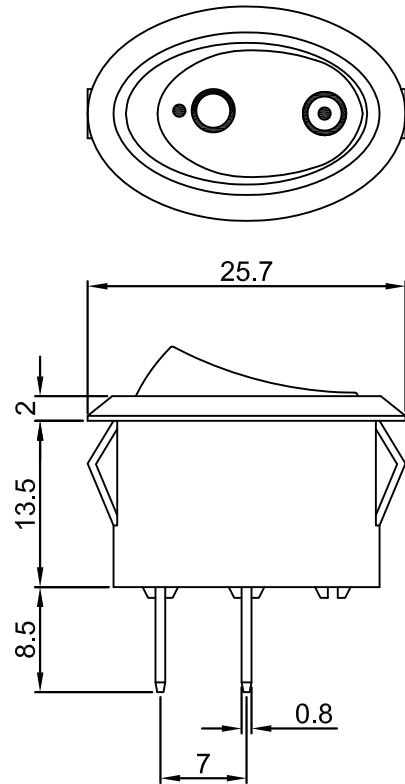

CUT-OUT

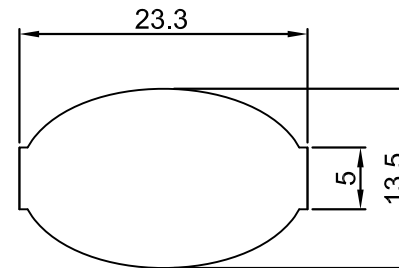

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:red brass ,silver or tin plated

X	0	1	3	4	5	7	8	9	A	B
Marking	None									

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ± 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2019.11.18	品名 TITLE	图号 DRAWING NO
				核准	王龙	核对	Z. H. B.	绘图	Z. H. B.	MR-2A-110-CGN-WW	MR-2A-110-CGN-WW_A0
版本 VER.	变更说明 CHANGE DESCRIPTION		日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY			