





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-2B



Rating: 6A 125V AC 6A 250V AC(UL CUL CQC)
6A 250V AC (UL CUL VDE CB)



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

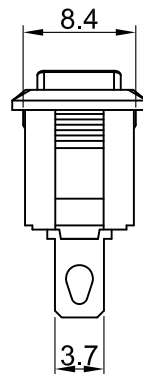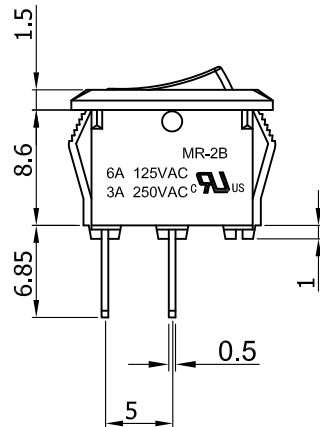


CUT-OUT



	X	Y
0.75~1.25	13.6-0.1	9.2±0.1
1.25~2.00	13.7-0.1	9.2±0.1
2.00~3.00	13.8-0.1	9.2±0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

X	0	1	3	4	5	6
Marking	None	•	=	—	⊥	⊥

公差 TOLERANCES				.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
版本 VERSION				A1	比例尺 SCALE	NONE	日期 DATE	2019.07.15	品名 TITLE
核准				王龙	核对	Z.H.B.	绘图	王立权	图号 DRAWING NO
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	DRAWN BY	MR-2B-110-C5N-BR		
A1	重新整理后发行	2019.07.15	N/A	王龙	王立权	王立权	MR-2B-110-C5N-BR		