


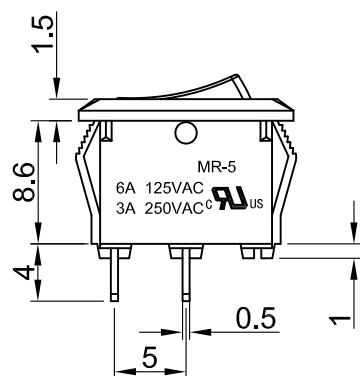





MR-5




Rating: 6A 125V AC (UL CUL)  US
3A 250V AC (UL CUL VDE CB) 
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C ~100°C

CUT-OUT



	X	Y
0.75~1.25	13.6-0.1	9.2±0.1
1.25~2.00	13.7-0.1	9.2±0.1
2.00~3.00	13.8-0.1	9.2±0.1



MATERIAL:

Body:Nylon66,UL rated:94V-2 min
Actuator:Nylon66,UL rated:94V-2 min
Terminal:Brass,silver or tin plated

X	0	1	3	4	5	6
Marking	None					

公差 TOLERANCES				.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.		
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	核准 APPROVED BY	王龙	比例尺 SCALE	NONE	日期 DATE	2019.07.15	品名 TITLE
				核 准	王龙	核 对	Z.H.B.	绘 图	王立权	MR-5-111-C5N-BR
				APPROVED BY	王龙	CHECKED BY	Z.H.B.	DRAWN BY	王立权	MR-5-111-C5N-BR_A0