



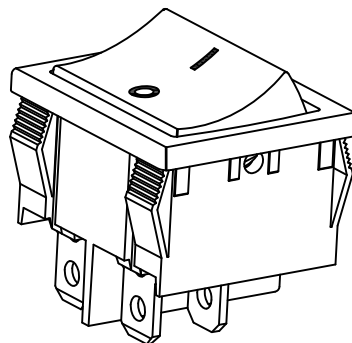

东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-4

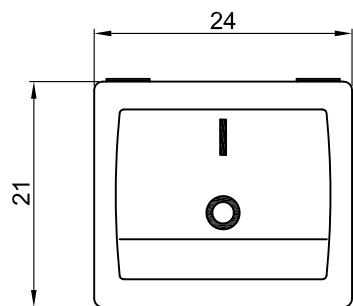

Rating: 10A 125V AC,6A 250V AC (UL CUL)US

6A 250V AC (VDE CQC CB)




Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

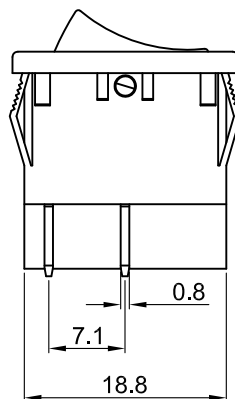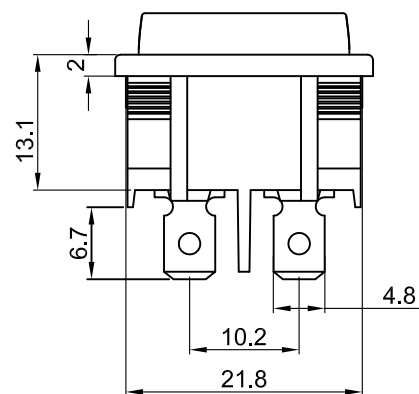

CUT-OUT


	X	Y
0.75~1.25	19.2~0.1	21.8~21.9
1.25~2.00	19.4~0.1	21.8~21.9
2.00~3.00	19.8~0.1	21.8~21.9

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated



X	0	1	2	3	4	5	7	8	9
Marking	None	•	ON OFF	=	— ○	I ○	Front/前进 Back/后退	Front Back	开 关

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.04.15	品名 TITLE	图号 DRAWING NO
				核准		核对	Z.H.B.	绘图		MR-4-210-C5N-AA	MR-4-210-C5N-AA_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A