

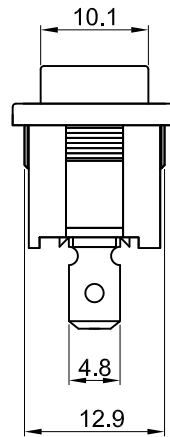
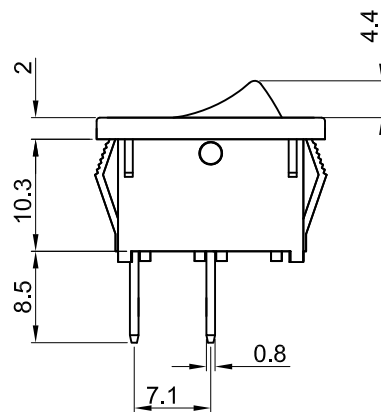




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1



Rating: 10A 125V AC (UL CUL)



6A 250V AC (CQC ENEC VDE CB)



Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C ~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None	•	ON OFF	=	—	! O	ON/开 OFF/关	* O	□	⚡	⚡	⚡	⚡	⚡	⚡	⚡	⚡	⚡

				公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ± 1°		单位 DIMENSION UNIT		mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2021.06.10	品名 TITLE	MR-1-110-C2N-BR	图 号 DRAWING NO
				核准		核对	Z. H. B.	绘图	HXG			MR-1-110-C2N-BR_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A