



MR-1

Rating: 10A 125V AC (UL CUL) c  US

6A 250V AC (CQC ENEC VDE)







Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

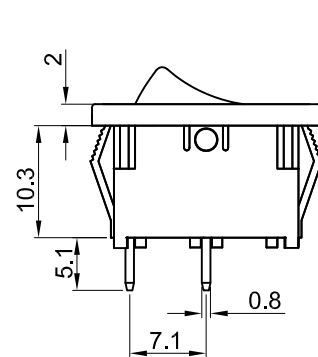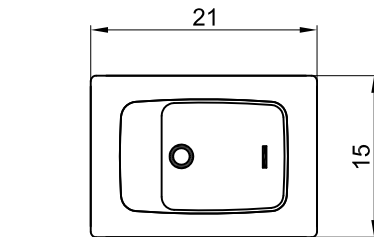


CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None		ON OFF				ON/开 OFF/关									开关		

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE		± 1°	单位	DIMENSION UNIT		mm.		
				版 本	A1	比例尺	NONE	日 期	2020.06.02		品 名		TITLE		图 号	
				VERSION		SCALE		DATE			MR-1-112-C5N-BB		DRAWING NO			
A1	重新整理后发行	2020.07.08	N/A	核 准		核 对	Z.H.B.	绘 图			MR-1-112-C5N-BB		MR-1-112-C5N-BB_A1			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY								