

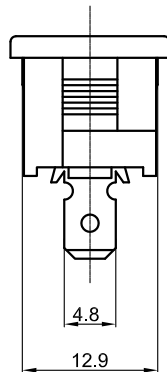




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-1

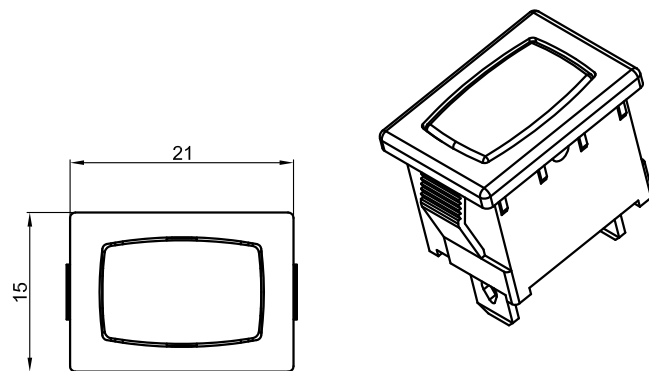

Rating: 10A 125V AC (UL CUL) c  us

6A 250V AC (CQC ENEC VDE)   

Contact Resistance: 50mΩ Max


Insulation Resistance: DC 500V 100MΩ Min

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1



MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

0	1	2	3	4	5	7	8	9	A	B	C	D	E	G	H	J	L
None																	

公差 TOLERANCES				.X± 0.3		.XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.	
版本 VERSION				比例尺 SCALE		日期 DATE		品名 TITLE		图号 DRAWING NO	
A1				重新整理后发行		2014.07.17		N/A		MR-1-110-POL-WG	
版本 VER.				变更说明 CHANGE DESCRIPTION		日期 DATE		ECN NO.		APPROVED BY	
				核准		核对		Z.H.B.		绘图	
				日期 DATE		2020.06.12		王立权		MR-1-110-POL-WG_A1	

File Code: HJ-WI-E-03A