



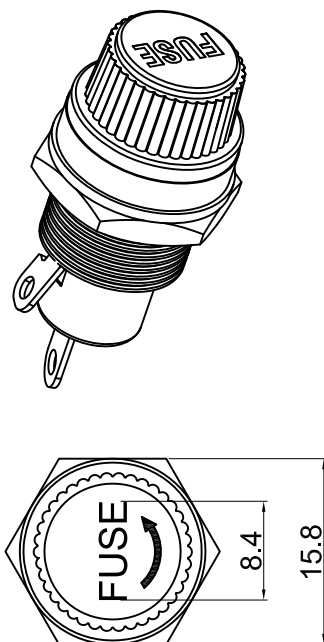

FH1-12

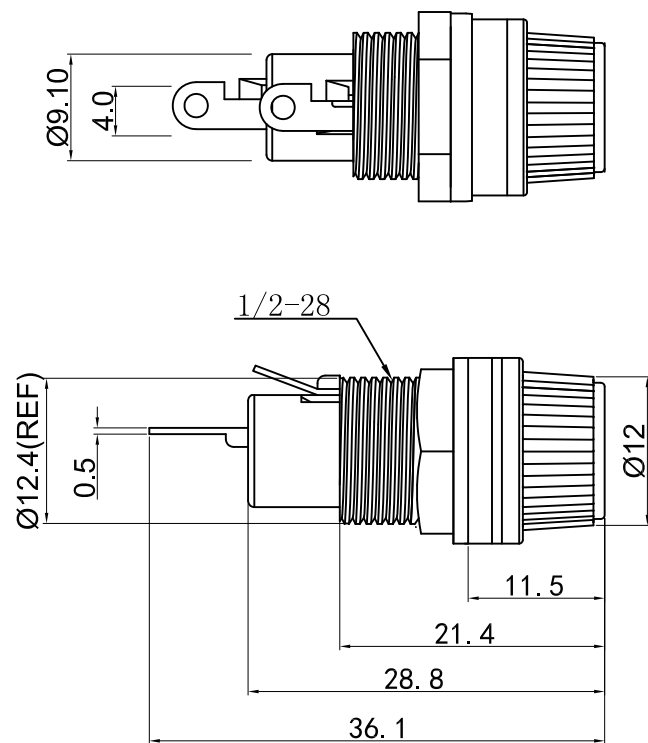

Fuse holder for overload protection

Screw-in mounting

Rating: 10A 250VAC (UL,CUL CE)

Fuse:Ø5.0x20mm


Cap:Screw type

Panel thickness:4.5mm max

Operating Temperature:-10°C~+70°C



PANEL MOUNTING



MATERIAL:

Housing:PBT,UL rated 94V0

Bayonet:PBT,UL rated 94V0

Terminal:Brass,silver or tin plated

Nut:Kirsite,Ni plated

|         |                         |            |         | 公差 TOLERANCES |    | . X± 0.3 . XX± 0.15 |          | 角度 ± 1°  |            | 单位 DIMENSION UNIT mm. |               |
|---------|-------------------------|------------|---------|---------------|----|---------------------|----------|----------|------------|-----------------------|---------------|
|         |                         |            |         | 版本 VERSION    | A1 | 比例尺 SCALE           | NONE     | 日期 DATE  | 2019.03.01 | 品名 TITLE              | 图号 DRAWING NO |
| A1      | 重新整理发行                  | 2019.03.01 | N/A     | 核准            |    | 核对                  | Z. H. B. | 绘图       | 王立权        | FH1-12-M              | FH1-12-M_A1   |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE    | ECN NO. | APPROVED BY   |    | CHECKED BY          |          | DRAWN BY |            |                       |               |