





宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

# FH1-200C


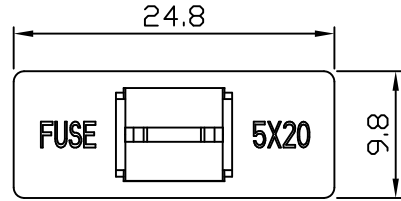


Fuse holder for overload protection  
Rating: 10A 250VAC (UL,CUL)


Fuse:  $\varnothing 5.0 \times 20 \text{mm}$  

Operating Temperature:  $0^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Dielectric Strength: 1500VAC 1 minute

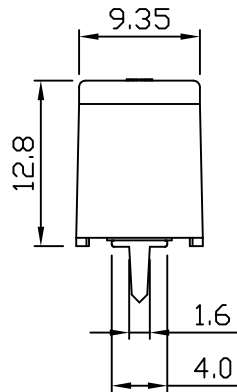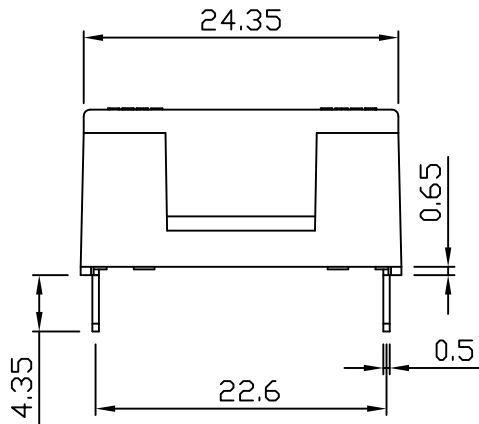

## P.C.B.LAYOUT

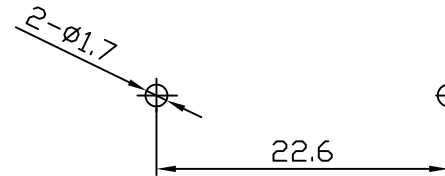

### MATERIAL:

Housing: PBT, UL rated 94V0 min

Bayonet: PBT, UL rated 94V0 min

Terminal: Phosphor bronze, silver or tin plated

				公差 TOLERANCES				角度 ANGLE $\pm 1^{\circ}$		单位 DIMENSION UNIT mm.	
A2	重新整理发行	2019.12.13	N/A	版本: VERSION	A2	比例尺 SCALE	1:1	日期 DATE	2019.12.13	品名 TITLE	图号 DRAWING NO
A1	重新整理发行	2014.07.26	N/A	核准		核对	Z. H. B.	绘图	王立权	FH1-200CK-G	FH1-200CK-G_A2
A0	New Issue	2009.02.26	N/A	APPROVED BY		CHECKED BY		DRAWN BY			
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO								