




东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

FH1-208



Fuse holder for overload protection
Rating: 10A 250VAC (UL,CUL,CQC,CE)
Operating Temperature:0℃~+85℃
Dielectric Strength For: 2000V AC/1min
Insulation Resistance: DC 500V 100MΩ min
Fuse:φ5.0x20mm
Wire:18# AWG UL 1015 105℃
Wire Length:230mm

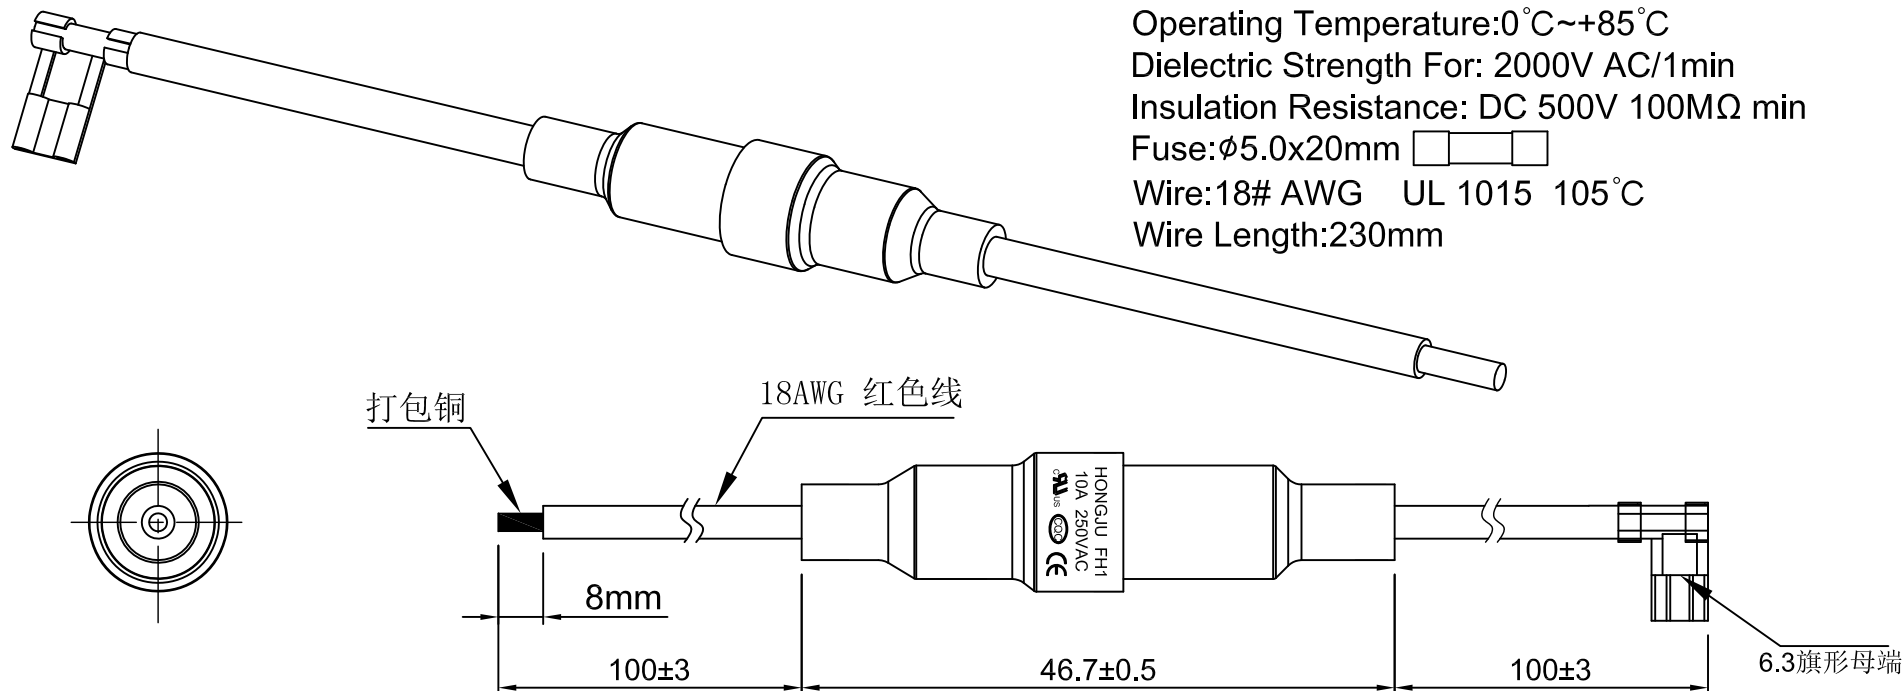

MATERIAL:

Housing:PBT,UL rated 94V-0

Bayonet:PBT,UL rated 94V-0

Terminal:Brass,or Brass tin plated

Wire:UL 1015 AWM 18 AWG

				公差 TOLEANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT mm.	
				版本	A0	比例尺	NONE	日期	2020.07.24	品名	图号
				VERSION		SCALE		DATE		TITLE	DRAWING NO
				核准		核对	杜沛钧	绘图	王立权	FH1-208-18-R-A120-B110F	FH1-208-18-R-A120-B110F_A0
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A