



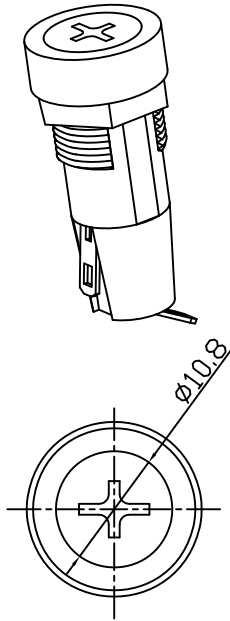

FH1

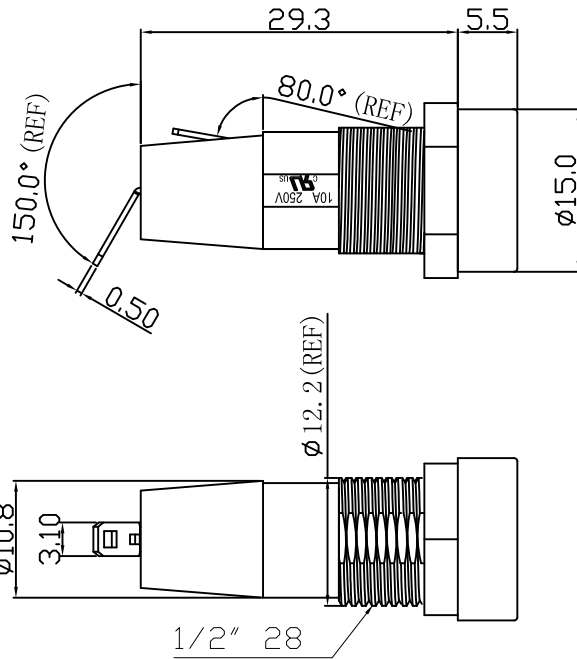

Fuse holder for overload protection
Screw-in mounting

Rating: 10A 250VAC (UL,CUL)
2.5W/6.3A 250VAC
(VDE,CQC,CE)


Fuse: $\varnothing 5.0 \times 20 \text{mm}$

Cap: Screw type

Panel thickness: 4.5mm max

Operating Temperature: $-10^{\circ}\text{C} \sim +70^{\circ}\text{C}$

PANEL MOUNTING



MATERIAL:

- Housing: PBT, UL rated 94V0 min
- Bayonet: PBT, UL rated 94V0 min
- Terminal: Brass, silver or tin plated
- Nut: PBT, UL rated 94V2 min

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度	± 1°	单位 DIMENSION UNIT	mm.
A1	重新发行	2020.3.6	N/A	版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.03.06	品名 TITLE	图号 DRAWING NO
A0	新发行	2014.7.15	N/A	核准		核对	Z. H. B.	绘图	王立权	FH1-520-P	FH1-520-P_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			