
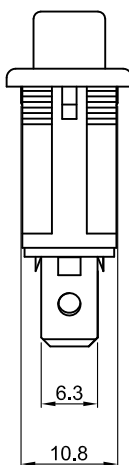
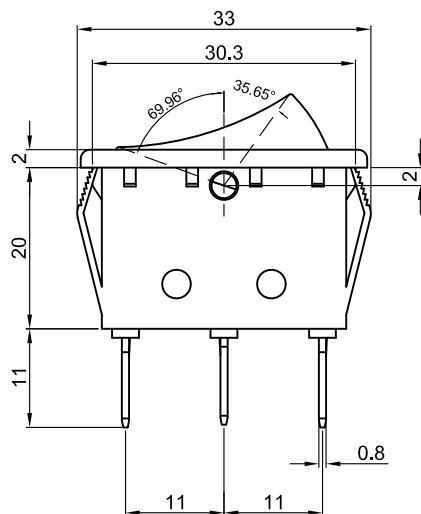


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R-1



Rating: 16A 125V AC (UL CUL)

16A 250V AC (UL CUL VDE ENEC CB CQC)

Contact Resistance: 50m Ω (Max)

Insulation Resistance: DC 500V 100M Ω (Min)


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C~85°C


Safety Approval:      

CUT-OUT

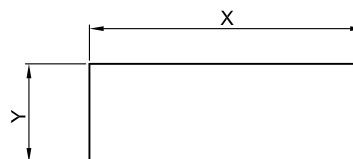

	X	Y
0.75~1.25	30.4+0.2	11.0+0.1
1.25~2.00	30.6+0.2	11.0+0.1
2.00~3.00	30.8+0.2	11.0+0.1

SWITCHING CIRCUIT



ON-ON

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator: Nylon66, UL rated: 94V-2 min

Terminal:Brass with silver-plate

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位	DIMENSION UNIT mm.	
				版 本 VERSION	A1	比 例 尺 SCALE	NONE	日 期 DATE	2020.07.02	品 名 TITLE		图 号 DRAWING NO
										R-1-120-C5N-BR		
A1	重新整理发行	2020.07.02	N/A	核 准		核 对		绘 图		R-1-120-C5N-BR_A1		
版本 VER.	变 更 说 明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A