







东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


R-1

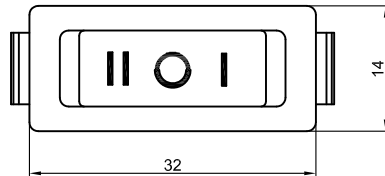

Rating: 16A 125V AC (UL CUL)
 16A 250V AC (UL CUL VDE ENEC CB CQC)
 Contact Resistance: 50m Ω (Max)
 Insulation Resistance: DC 500V 100M Ω (Min)
 Dielectric Strength: AC1500V 1 minute
 Electrical life: 10,000 cycles
 Operating Temperature: 0°C~85°C
 Safety Approval:

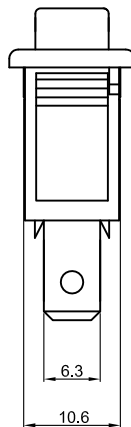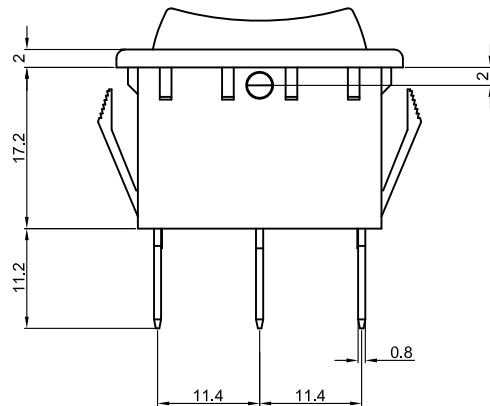

CUT-OUT




	X	Y
0.75~1.25	30.4+0.2	11.0+0.1
1.25~2.00	30.6+0.2	11.0+0.1
2.00~3.00	30.8+0.2	11.0+0.1

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate



(ON)-OFF-(ON)

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE	$\pm$ 1°	单位	DIMENSION UNIT	mm.
				版本	A1	比例尺	NONE	日期	2020.07.02	品名	TITLE	图号
				VERSION		SCALE		DATE				DRAWING NO
A1	重新整理发行	2020.07.02	N/A	核准		核对	Z.H.B.	绘图		R-1-160-C6N-BB		R-1-160-C6N-BB-A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A