

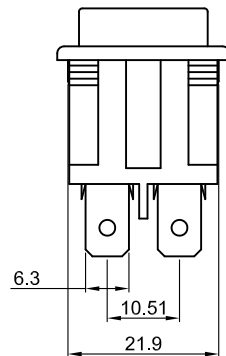





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R-4



Rating: 16A 125V AC (UL CUL )

16A 250V AC (UL CUL VDE ENEC CB CQC)

Contact Resistance: 50m  $\Omega$  (Max)

Insulation Resistance: DC 500V 100M  $\Omega$  (Min)


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C~85°C

Safety Approval:

CUT-OUT



|           | X         | Y         |
|-----------|-----------|-----------|
| 0.75~1.25 | 28.0+0.10 | 22.0+0.10 |
| 1.25~2.00 | 28.2+0.10 | 22.0+0.10 |
| 2.00~3.00 | 28.4+0.10 | 22.0+0.10 |



ON-OFF

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC/Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate

|         |                         |            |         | 公差 TOLEANCES |    | .X $\pm$ 0.3 | .XX $\pm$ 0.15 | 角度 ANGLE $\pm$ 1° |            | 单位 DIMENSION UNIT mm. |                   |
|---------|-------------------------|------------|---------|--------------|----|--------------|----------------|-------------------|------------|-----------------------|-------------------|
|         |                         |            |         | 版本           | A2 | 比例尺          | NONE           | 日期                | 2020.12.21 | 品名                    | 图号                |
| A2      | 触点改成银氧化锡钢               | 2020.12.21 | N/A     | VERSION      |    | SCALE        |                | DATE              |            | R-4-210-C5L-BG        | DRAWING NO        |
| A1      | 重新整理发行                  | 2014.07.04 | N/A     | 核准           |    | 核对           | Z.H.B.         | 绘图                |            |                       | R-4-210-C5L-BG_A2 |
| 版本 VER. | 变更说明 CHANGE DESCRIPTION | 日期 DATE    | ECN NO. | APPROVED BY  |    | CHECKED BY   |                | DRAWN BY          |            |                       |                   |

File Code: HJ-WI-E-03A