





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R-4



Rating: 16A 125V AC (UL CUL)

16A 250V AC (UL CUL VDE ENEC CB CQC)

Contact Resistance: 50m Ω (Max)



Insulation Resistance: DC 500V 100M Ω (Min)

Dielectric Strength: AC1500V 1 minute


Electrical life: 10,000 cycles

Operating Temperature: 0 $^{\circ}$ C~85 $^{\circ}$ C


Safety Approval:

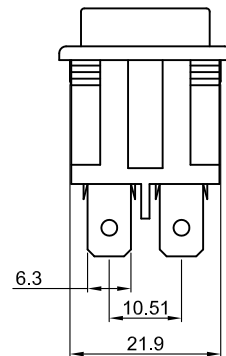

CUT-OUT



	X	Y
0.75~1.25	28.0+0.10	22.0+0.10
1.25~2.00	28.2+0.10	22.0+0.10
2.00~3.00	28.4+0.10	22.0+0.10



ON-OFF-ON

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate

				公差 TOLEANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1 $^{\circ}$		单位 DIMENSION UNIT mm.	
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.07.04	品名 TITLE	图号 DRAWING NO
A1	重新整理发行	2014.07.04	N/A	核准		核对	Z.H.B.	绘图		R-4-220-C5N-BB	R-4-220-C5N-BB_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A