





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R



Rating: 25A 125V AC

25A 250V AC



Contact Resistance: 50m Ω (Max)

Insulation Resistance: DC 500V 100M Ω (Min)


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles


Operating Temperature: 0°C~85°C

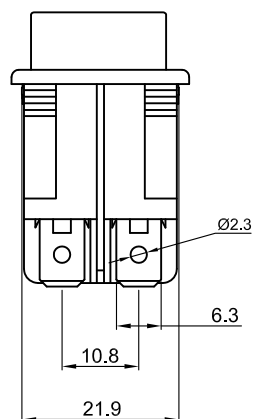

CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	122.0+0.1
1.25~2.00	30.2+0.1	122.0+0.1
2.00~3.00	30.4+0.1	122.0+0.1



ON-OFF

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC/Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate

Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF	ON OFF	Front/前进 Back/后退	Front Back	强劲 柔和	RUN STOP	充电 放电	开关	开关	开关

				公差 TOLEANCES		.X± 0.3	.XX± 0.15	角度		± 1°	单位 DIMENSION UNIT		mm.		
				版本 VERSION	A0	比例尺 SCALE	NONE	日期 DATE	2020.08.25		品名 TITLE		图号 DRAWING NO		
				核准 APPROVED BY		核对 CHECKED BY	Z. H. B.	绘图 DRAWN BY	王立权		R-210-C5L-WU		R-210-C5L-WU-A1		
版本 VER.	变更说明 CHANGE DESCRIPTION		日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z. H. B.	DRAWN BY	王立权	R-210-C5L-WU		R-210-C5L-WU-A1		

File Code: HJ-WI-E-03A