

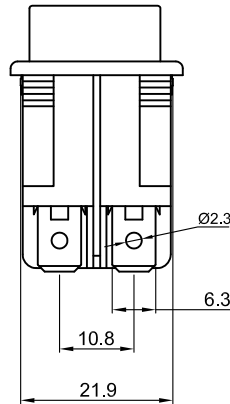





东莞市宏聚电子五金制品有限公司


HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

R




Rating: 16A 125V AC (UL CUL)
16A 250V AC (UL CUL VDE ENEC CB CQC)
Contact Resistance: 50m Ω (Max)
Insulation Resistance: DC 500V 100M Ω (Min)
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C~85°C
Safety Approval:

CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	122.0+0.1
1.25~2.00	30.2+0.1	122.0+0.1
2.00~3.00	30.4+0.1	122.0+0.1



ON-OFF

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate

Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None	•	ON OFF	=	-	○	! ○	Front/前进 Back/后退	Front Back	强劲 柔和		RUN STOP	充电 放电	开关	

					公差 TOLERANCES		.X± 0.3 .XX± 0.15		角度 ANGLE ± 1°		单位 DIMENSION UNIT mm.			
					版 本 VERSION	A1	比 例 尺 SCALE	NONE	日 期 DATE	2020.07.01	品 名 TITLE	图 号 DRAWING NO		
A1	重新整理发行				2020.07.01	N/A	核 准		绘 图				R-210-C5N-WW	R-210-C5N-WW_A1
版本 VER.	变 更 说 明	CHANGE DESCRIPTION		日期 DATE	ECN NO.	APPROVED BY	核 对	CHECKED BY	Z.H.B.	DRAWN BY				

File Code: HJ-WI-E-03A