







东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD


R




Rating: 16A 125V AC (UL CUL)
16A 250V AC (UL CUL VDE ENEC CB CQC)
Contact Resistance: 50m Ω (Max)
Insulation Resistance: DC 500V 100M Ω (Min)
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0 $^{\circ}$ C~85 $^{\circ}$ C
Safety Approval:

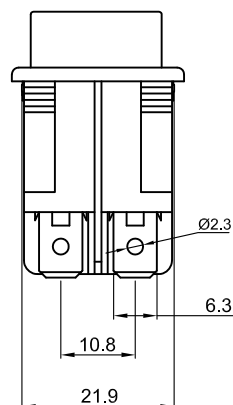

CUT-OUT



	X	Y
0.75~1.25	30.0+0.1	122.0+0.1
1.25~2.00	30.2+0.1	122.0+0.1
2.00~3.00	30.4+0.1	122.0+0.1

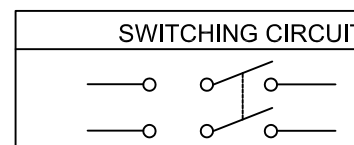

ON-ON

MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass with silver-plate

Marking	x	0	1	2	3	4	5	7	8	9	B	C	E	F	G
柄	None	•	ON OFF	=	-	! O	Front/前进 Back/后退	Front Back	强劲 柔和	RUN STOP	充电 放电	开关			

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1 $^{\circ}$		单位 DIMENSION UNIT		mm.			
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2020.10.15	品名 TITLE		图号 DRAWING NO			
				核准		核对		绘图		R-220-CJL-BG		R-220-CJL-BG			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY							

File Code: HJ-WI-E-03A