

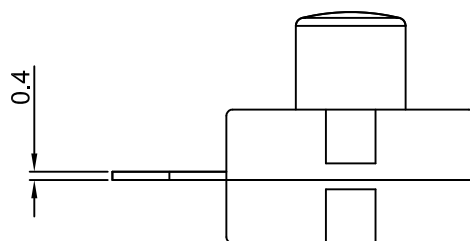



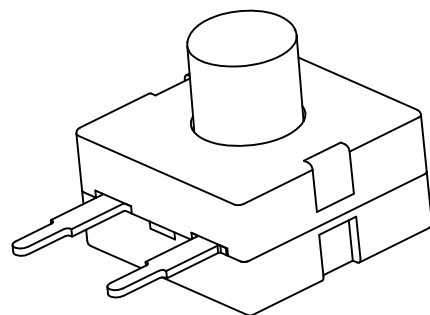

TS202

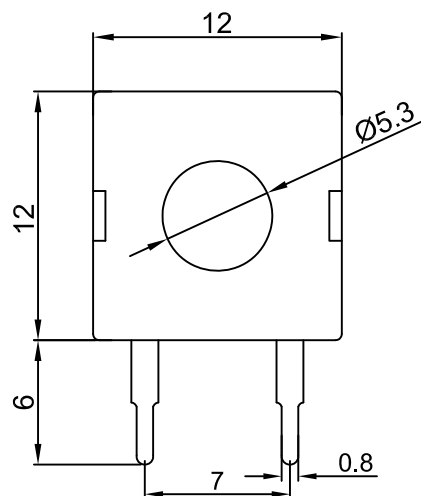

SPECIFICAIONS:

Rating: DC30V 1A ;

Contact resistance: 100m Ω (Max.) ;Insulation resistance: DC500V 100M Ω (Min.) ;

Withstand voltage: AC 1000V for 1 minute ;

Operating force: 700 $\pm$ 150g ;

Life cycle: 20,000 cycles ;

Total Travel: 1.5 $\pm$ 0.3 mm .

MATERIAL:


Frame:Nylon66,UL rated:94V-2 Min. ;

Cap:POM ;

Terminal:Brass,Silver or Tin plated .

Function:

ON(P-6)-OFF-ON (P-1)-OFF



P.C.B. LAYOUT

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度	$\pm$ 1°	单位 DIMENSION UNIT	mm.
				版本	A1	比例尺	NONE	日期	2020.07.15	品名	TITLE
				核准		核对	Z. H. B.	绘图	王立权	TS202-21-4-W(高柄)	图号
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			DRAWING NO
											TS202-21-4-W_A1