



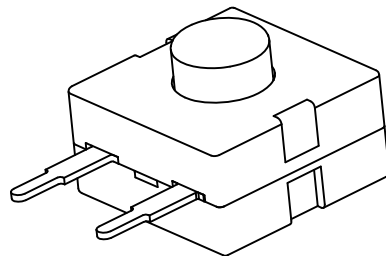

宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS202

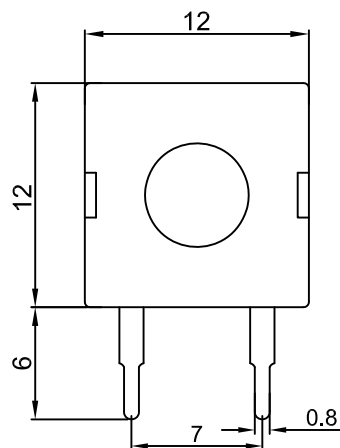

SPECIFICATIONS:




Rating: DC30V 1A ;
Contact resistance: 100m Ω (Max.) ;
Insulation resistance: DC500V 100M Ω (Min.) ;
Withstand voltage: AC 1000V for 1 minute ;
Operating force: 700 $\pm$ 150g ;
Life cycle: 20,000 cycles ;
Total Travel: 1.5 $\pm$ 0.3 mm .

MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;
Cap:POM ;
Terminal:Brass,Silver or Tin plated .

Function:

ON(P-6)-OFF-ON (P-1)-OFF

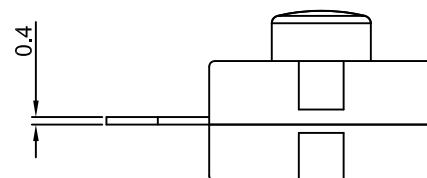

P.C.B. LAYOUT

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

					公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
					版 本	A1	比 例 尺	NONE	日 期	2020.07.12	品 名 TITLE	图 号
A1	重新整理发行		2020.07.12	N/A	VERSION		SCALE		DATE		TS202-21-4-Y	DRAWING NO
A0	New Issue		2008.07.08	N/A	核 准		核 对		绘 图			TS202-21-4-Y_A1
版本 VER.	变 更 说 明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY	Z.H.B.	DRAWN BY			

File Code: HJ-WI-E-03A