

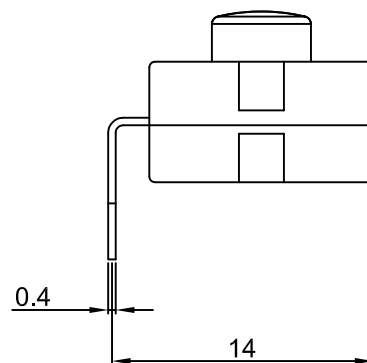
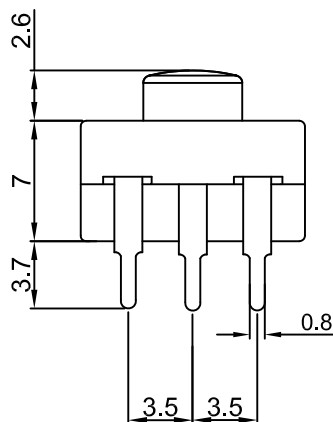




宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS202

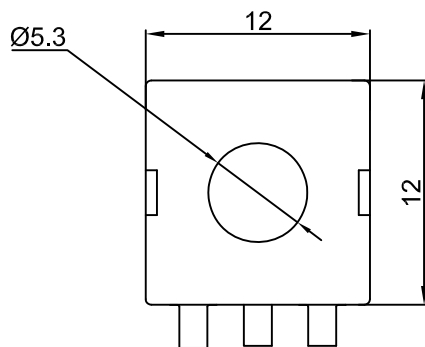

SPECIFICATIONS:


Rating: DC30V 1A ;
Contact resistance: 100m Ω (Max.) ;
Insulation resistance: DC500V 100M Ω (Min.) ;
Withstand voltage: AC 1000V for 1 minute ;
Operating force: 700 $\pm$ 150g ;
Life cycle: 20,000 cycles ;
Total Travel: 1.5 $\pm$ 0.3 mm .

MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;
Cap:POM ;
Terminal:Brass,Silver or Tin plated .

Function:

ON(P-6)-OFF-ON (P-1)-OFF



P.C.B. LAYOUT

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
				版 本 VERSION	A1	比例尺 SCALE	NONE	日 期 DATE	2020.07.12	品 名 TITLE	图 号 DRAWING NO
A1	重新整理发行	2020.07.12	N/A	核 准		核 对		绘 图		TS202-31-1-B	TS202-31-1-B_A1
A0	New Issue	2008.07.08	N/A	核 准		核 对	Z.H.B.	绘 图			
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A