



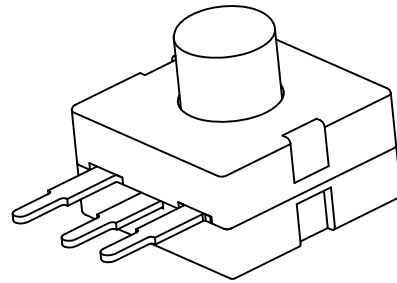

TS202

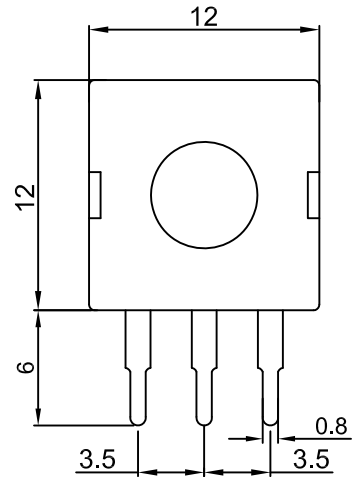

SPECIFICAIONS:

Rating: DC30V 1A ;

Contact resistance: 100m Ω (Max.) ;

Insulation resistance: DC500V 100M Ω (Min.) ;

Withstand voltage: AC 1000V for 1 minute ;

Operating force: 700 $\pm$ 150g ;

Life cycle: 20,000 cycles ;

Total Travel: 1.5 $\pm$ 0.3 mm .

MATERIAL:




Frame:Nylon66,UL rated:94V-2 Min. ;

Cap:POM ;

Terminal:Brass,Silver or Tin plated .

Function:

ON(P-6)-OFF-ON (P-1)-OFF

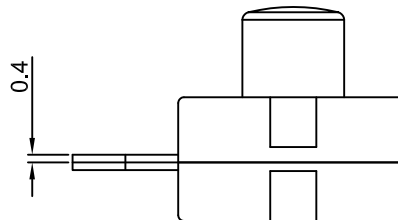

P.C.B. LAYOUT

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

				公差 TOLEANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度	$\pm$ 1°	单位 DIMENSION UNIT	mm.
				版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	20204.07.15	品名 TITLE	图号 DRAWING NO
				核准 APPROVED BY	王龙	核对 CHECKED BY	Z. H. B.	绘图 DRAWN BY	黎夏	TS202-31-4-B(高柄)	TS202-31-4-B_A0
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.								