

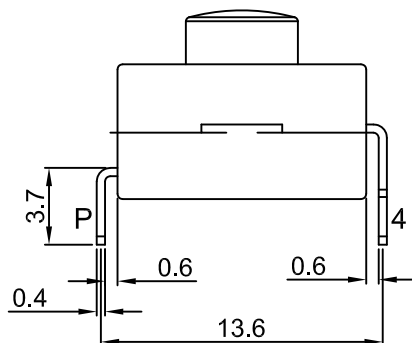
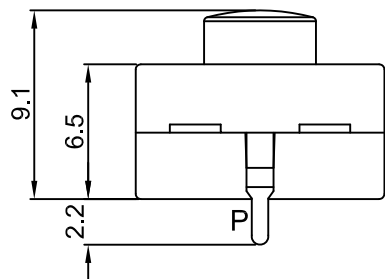


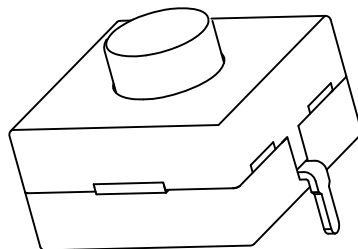

TS203

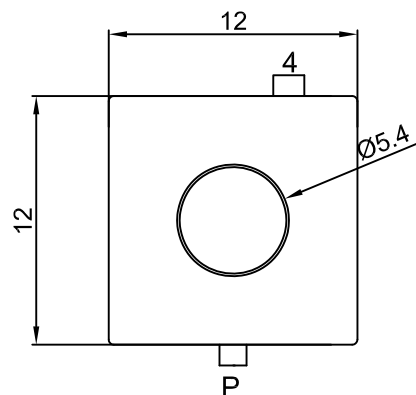

SPECIFICAIONS:

Rating: DC30V 1A ;

Contact resistance: 100m Ω (Max.) ;Insulation resistance: DC500V 100M Ω (Min.) ;

Withstand voltage: AC 1000V for 1 minute ;

Operating force: 500 $\pm$ 200gf ;

Life cycle: 20,000 cycles ;

Total Travel: 1.5 $\pm$ 0.3mm .

MATERIAL:


Frame: Nylon66+15%GF ;

Cap: POM;

Terminal:Brass,Silver or Tin plated .

Function:

ON(P-1,4)-ON(P-5)-ON(P-6)

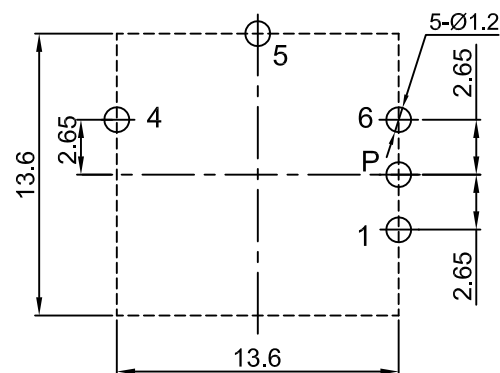

P.C.B.LAYOUT (Bottom View)

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度	$\pm$ 1°	单位 DIMENSION UNIT	mm.
				版本	A0	比例尺	NONE	日期	2019.05.24	品名 TITLE	图号
				VERSION		SCALE		DATE		TS203-24-1-B	DRAWING NO
				核准	陈宗胜	核对	Z. H. B.	绘图	王立权		TS203-24-1-B_A0
版本 VER.	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY			