

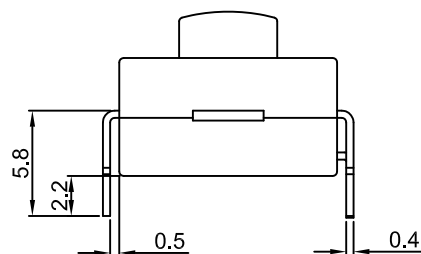
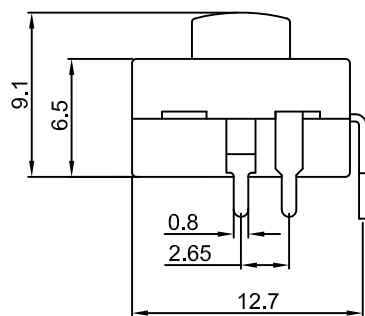




宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS203

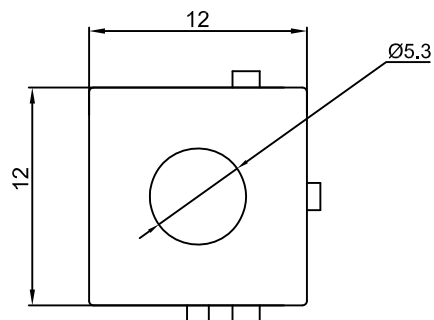


SPECIFICAIONS:

Rating: DC30V 1A ;
Contact resistance: 100m Ω (Max.) ;
Insulation resistance: DC500V 100M Ω (Min.) ;
Withstand voltage: AC 1000V for 1 minute ;
Operating force: 500 $\pm$ 200gf ;
Life cycle: 20,000 cycles ;
Total Travel: 1.5 $\pm$ 0.3mm .

MATERIAL:

Frame: Nylon66+15%GF;
Cap: POM;
Terminal:Brass,Silver or Tin plated .
Function:
ON(P-1)-ON(P-2)-ON(P-3)-OFF

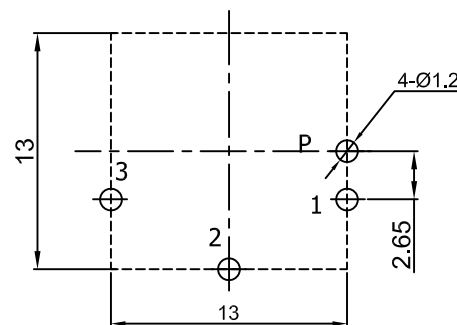

P.C.B.LAYOUT(BottomView)

X	Cap Color
R	Red 红色
Y	Yellow 黄色
G	Green 绿色
B	Black 黑色
U	Blue 蓝色
W	White 白色
A	Gray 灰色

				公差 TOLERANCES		.X± 0.3	.XX± 0.15	角度 ANGLE ± 1°		单位 DIMENSION UNIT	mm.
A1	重新整理发行	2020.07.15	N/A	版 本 VERSION	A1	比例尺 SCALE	NONE	日 期 DATE	2020.07.15	品 名 TITLE TS203-41-1-R	图 号 DRAWING NO
A0	New Issue	2008.07.08	N/A	核 准		核 对	Z.H.B.	绘 图			TS203-41-1-R_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A