




宏聚电子五金制品有限公司

HONGJU ELECTRONIC & METAL PRODUCTS CO.,LTD

TS205

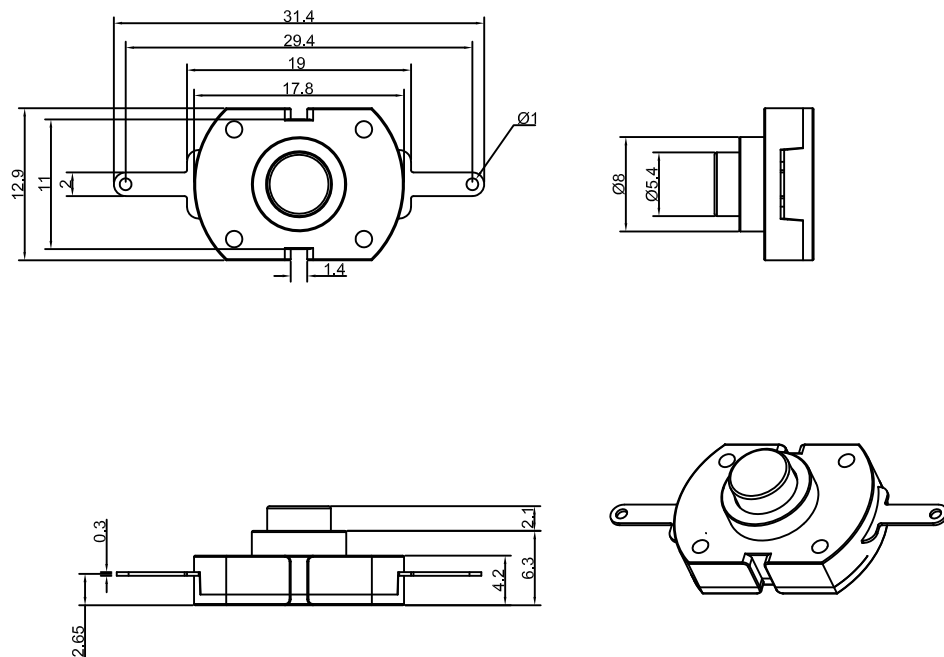


Specifications

Current rating	:2A
Voltage rating	:12VDC
Dielectric withstanding voltage	:500VAC 0.5mA for 1 minute
Contact resistance	:50m Ω Max.(Initial)
Insulation resistance	:100M Ω Min.
Operating force	:600 $\pm$ 200gf
Total travel	:1.0mm $\pm$ 0.2mm
Mechanical service life	:30,000 cycles Min.
Solder specifications	:260 $^{\circ}$ C for 5 seconds
Operating temperature	:0 $^{\circ}$ C ~ +60 $^{\circ}$ C
Function	: OFF - (ON)

MATERIAL:

Frame:Nylon66,UL rated:94V-2 Min. ;
Cap: POM;
Terminal:Brass,Silver or Tin plated.

SWITCHING CIRCUIT



Y	Yellow 黄色
R	Red 红色
O	Orange 橙色
B	Black 黑色
A	Gray 灰色
G	Green 绿色
Cap Color X 按键颜色 X	

				公差 TOLERANCES		.X $\pm$ 0.3	.XX $\pm$ 0.15	角度 ANGLE $\pm$ 1 $^{\circ}$		单位 DIMENSION UNIT	mm.
				版本	A1	比例尺	NONE	日期	2020.07.28	品名 TITLE	图号
A1	重新整理发行	2020.07.28	N/A	VERSION		SCALE		DATE		TS205-B-2-Y	DRAWING NO
A0	New Issue	2008.07.08	N/A	核准		核对	Z. H. B.	绘图	Z. H. B.		TS205-B-2-Y_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY			

File Code: HJ-WI-E-03A