

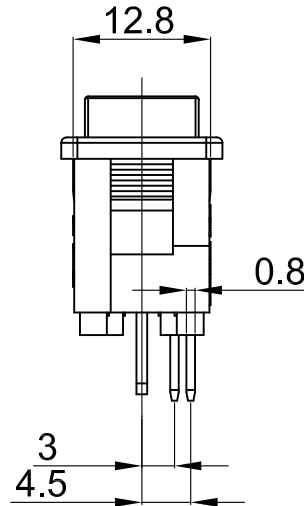
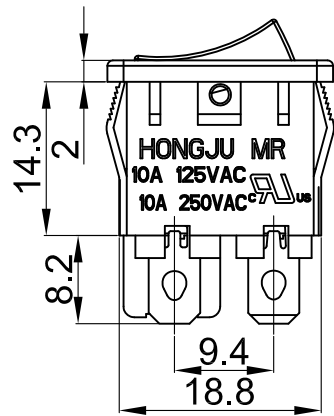





MR-6



Rating: 10A 125V AC (UL CUL)
6A 250V AC (VDE CQC CB)
Contact Resistance: 50mΩ Max
Insulation Resistance: DC 500V 100MΩ Min
Dielectric Strength: AC1500V 1 minute
Electrical life: 10,000 cycles
Operating Temperature: 0°C ~ 85°C

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:Nylon66,UL rated:94V-2 min

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



X	0	1	2	4	5	6	7
Marking	None		ON OFF			OFF ON	开关

				公差 TOLERANCES		.X± 0.3	.XX± 0.2	角度 ANGLE	± 1°	单位	DIMENSION UNIT mm.	
				版本	A1	比例尺	NONE	日期	2020.07.15	品名	TITLE	图号
				核 准		核 对	Z.H.B.	绘 图		MR6-110-C5N-BB		DRAWING NO
A1	重新整理发行	2020.07.15	N/A	核 准		核 对	Z.H.B.	绘 图		MR6-110-C5N-BB		MR6-110-C5N-BB_A1
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY		CHECKED BY		DRAWN BY				