





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6



Rating: 10A 125V AC (UL CUL)
6A 250V AC (VDE CQC CB)



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~ 85°C

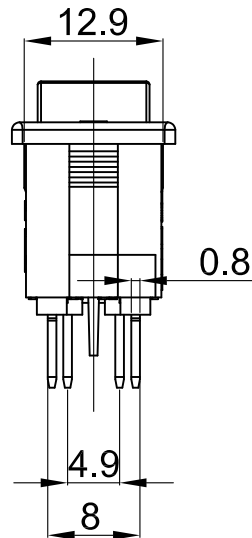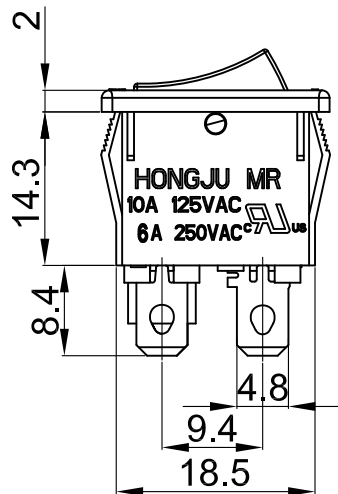

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



X	0	1	2	4	5	6	7
Marking	None		ON OFF			OFF ON	开关

				公差 TOLERANCES		.X±0.3	.XX±0.2	角度 ANGLE	± 1°	单位	DIMENSION UNIT		mm.
				版本	A1	比例尺	NONE	日期	2020.07.15	品名	TITLE	图号	
				重新整理发行	2020.07.15	N/A		核 准		核 对	Z.H.B.	绘 图	
A1	变更说明	CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY		MR-6-210-C5L-WG		MR-6-210-C5L-WG-A1	

File Code: HJ-WI-E-03A