




MR-6

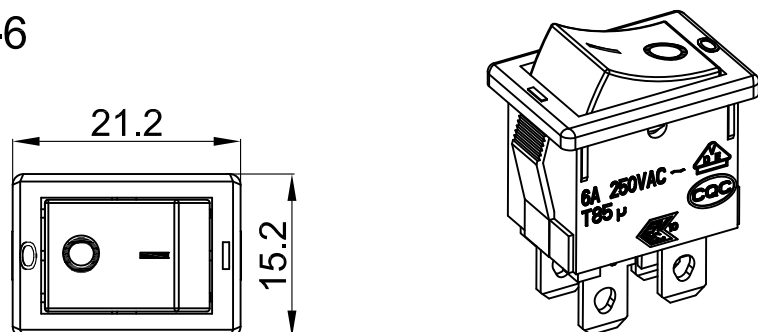

Rating: 10A 125V AC (UL CUL)
6A 250V AC (VDE CQC CB)


Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~ 85°C

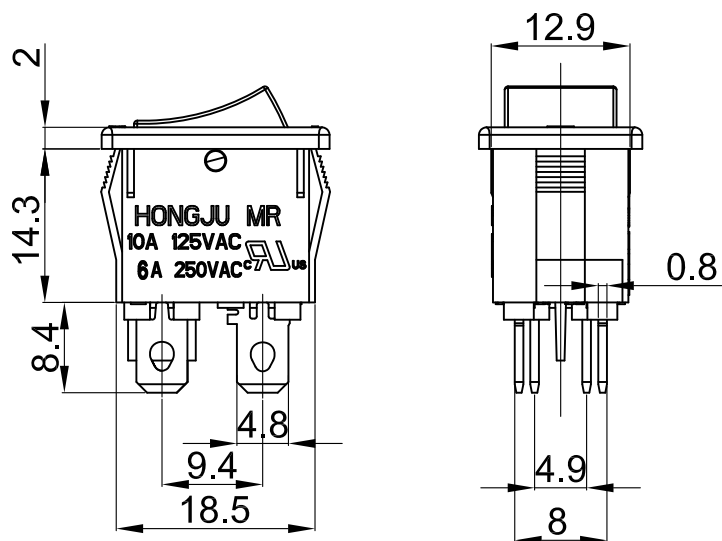

CUT-OUT



	X	Y
0.75~1.25	19.2-0.1	13.0+0.1
1.25~2.00	19.4-0.1	13.0+0.1
2.00~3.00	19.8-0.1	13.0+0.1


MATERIAL:

Body:Nylon66,UL rated:94V-2 min

Actuator:PC

Terminal:Brass,silver or tin plated

SWITCHING CIRCUIT



X	0	1	2	4	5	6	7
Marking	None						

				公差 TOLERANCES		.X± 0.3 .XX± 0.2		角度 ANGLE ± 1°		单位	DIMENSION UNIT	mm.	
				版 本	A1	比 例 尺	NONE	日 期	2020.07.15	品 名	TITLE	图 号	
				VERSION		SCALE		DATE					DRAWING NO
A1	重新整理发行	2020.07.15	N/A	核 准		核 对		绘 图					MR-6-210-C5L-WR
版本 VER.	变 更 说 明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY	Z.H.B.	DRAWN BY						