





东莞市宏聚电子五金制品有限公司

HONGJU(DONGGUAN)ELECTRONIC & METAL PRODUCTS CO.,LTD

MR-6

受控文件



Rating: 10A 125V AC (UL CUL)
6A 250V AC (VDE CQC CB)



Contact Resistance: 50mΩ Max

Insulation Resistance: DC 500V 100MΩ Min


Dielectric Strength: AC1500V 1 minute

Electrical life: 10,000 cycles

Operating Temperature: 0°C ~ 85°C

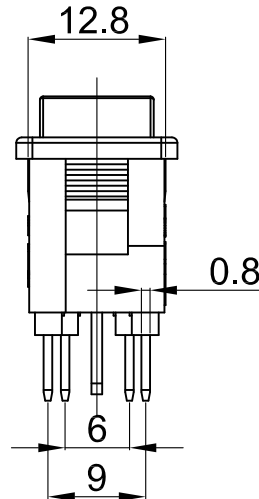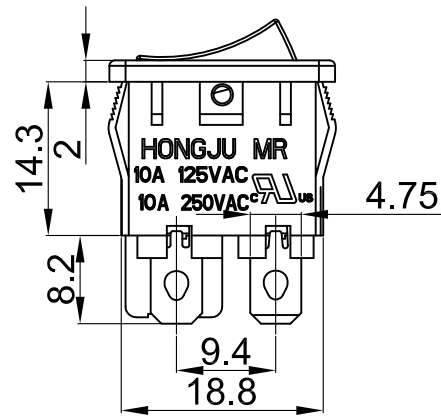


CUT-OUT



	X	Y
0.75~1.25	19.2~0.1	13.0~0.1
1.25~2.00	19.4~0.1	13.0~0.1
2.00~3.00	19.8~0.1	13.0~0.1

SWITCHING CIRCUIT



MATERIAL:

Body:Nylon66,UL rated:94V-0 min

Actuator:Nylon66,UL rated:94V-0 min

Terminal:Brass,silver or tin plated

X	0	1	2	4	5	6	7
Marking	None		ON OFF			OFF ON	开关

公差 TOLERANCES				角度 ANGLE				单位 DIMENSION UNIT			
				.X±0.3	.XX±0.2	±1°		mm.			
			版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE	2021.3.15	品名 TITLE	图号 DRAWING NO	
A1	重新整理后发行	2014.07.15	N/A	核准	核对	Z.H.B.	绘图		MR-6-210-C5N-BW	MR-6-210-C5N-BW_A1	
版本 VER.	变更说明 CHANGE DESCRIPTION	日期 DATE	ECN NO.	APPROVED BY	CHECKED BY		DRAWN BY				

File Code: HJ-WI-E-03A